

## Statement of Verification

BREG EN EPD No.: 000349

Issue 01

This is to verify that the  
**Environmental Product Declaration**  
provided by:  
**Jeld-Wen**



is in accordance with the requirements of:  
**EN 15804:2012+A1:2013**  
and  
**BRE Global Scheme Document SD207**

This declaration is for:  
**Solid Core Door EI30/R'w 35dB PL**

### Company Address

JELD-WEN Danmark A/S  
Danmarksvej 9  
DK-9670 Løgstør  
Denmark



A handwritten signature in black ink, appearing to read 'E Baker'.

Signed for BRE Global Ltd

Emma Baker  
Operator

04 February 2021  
Date of this Issue

04 February 2021  
Date of First Issue

03 February 2026  
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit [www.greenbooklive.com/terms](http://www.greenbooklive.com/terms).)

To check the validity of this statement of verification please, visit [www.greenbooklive.com/check](http://www.greenbooklive.com/check) or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.  
T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: [Enquiries@breglobal.com](mailto:Enquiries@breglobal.com)

# Environmental Product Declaration

EPD Number: 000349

## General Information

EPD Programme Operator	Applicable Product Category Rules
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012+A1:2013
Commissioner of LCA study	LCA consultant/Tool
JELD-WEN Danmark A/S Danmarksvej 9 DK-9670 Løgstør Denmark	BRE-Lina
Declared/Functional Unit	Applicability/Coverage
Painted PL door leaf in size M10x21 (926x2040 mm) contains 3 hinges 3228 and lock 565. Door leaf weight is 56,18kg.	Product Average.
EPD Type	Background database
Cradle to Gate	ecoinvent 3.2 was released in 2015
Demonstration of Verification	
CEN standard EN 15804 serves as the core PCR <sup>a</sup>	
Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
(Where appropriate <sup>b</sup> ) Third party verifier: Nigel Jones	
a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)	
Comparability	
Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A1:2013. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A1:2013 for further guidance	

## Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
					Related to the building fabric					Related to the building						
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: Ticks indicate the Information Modules declared.

## Manufacturing site(s)

The product is only produced at one production site, in Forserum, Sweden.

JELD-WEN Sverige AB Fabriksgatan 38 SE-571 78 Forserum Sweden	
--	--

## Construction Product:

### Product Description

Interior performance door manufactured with a 60 mm wood-based solid core construction built for professional demands and communal use e.g. for Schools, Hospitals, offices and Hotels. The rebated construction is equipped with acoustic seals, strong hinges and locks for cylinders, combinations that allows the door type to be a perfect choice as well for interior flat entrance use. The door offering includes classification options for E30 and EI30 fire rating, 35dB sound reduction (Rw38dB), cold and hot smoke classification and durability performance in heavy to severe duty.

### Technical Information

Fire and sound classification is valid only, if product is used as a doorset. Product type approvals can be found on RISE certified product overview. Link to the certification: <http://publiccert.ri.se/en/Product/Index/0984/79>

Property	Value, Unit
Fire classification: (Test standard: EN 1634-1* Classification standard: According to Boverkets byggregler (BBR), 5:231.)	EI30
Sound classification: (Test standard: EN ISO 10140-1 Classification standard: According to SS 25267:2004 – Swedish standard)	R'w 30/35dB

### Main Product Contents


A 60 mm wood-based painted PL door leaf.

Material/Chemical Input	%
Solid wood	10,4
Flax board	44,9
HDF	37,3
Binder	2,5
Paper	0,7
Metal	2
Sealings	0,6
Surface treatment (Primer; Paint)	1,6

### Manufacturing Process

After entering the door order in the production program, the presence of raw material is checked. If the raw material is not in our warehouse, an order is placed and the material manufacturer transports the material to our factory. The production of a door begins with the gluing and pressing of the door materials together. The door leaf is then milled to the correct dimensions and the seal grooves, lock and hinge holes are milled. Edge band is glued to the edge of the door. Next, the door leaf moves to the surface treatment, where the surface of the door leaf is primed and painted. After surface treatment, the lock, hinges and seals are installed and the product is ready for packaging and shipping.

### Process flow diagram

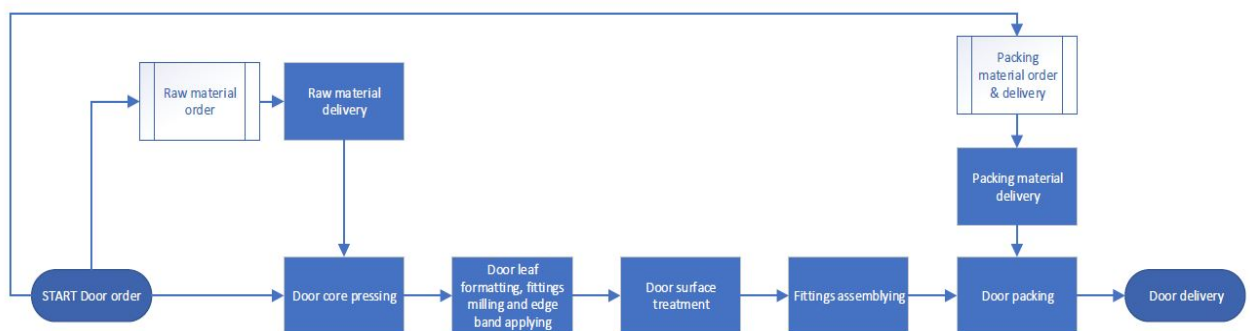

A flow diagram of classified door leaf production.

## Life Cycle Assessment Calculation Rules

### Declared / Functional unit description

Painted PL door leaf in size M10x21 (926x2040 mm) contains: 3 hinges 3228 and lock 565. Door leaf weight is 56,18kg.

### System boundary

The EPD covers the product stage only and is called "cradle-to-gate A1-A3" according to the definition in the PCR. The product stage or "Cradle-to-Gate" includes: A1 raw material extraction and processing of secondary material input; A2 transport of raw materials and inputs to the manufacturer and A3 manufacturing of the products, and packing. This stage includes the provision of all materials, products and energy, as well as waste processing up to the end-of waste state or disposal of final residues during the product stage.

### Data sources, quality and allocation

**Data quality requirements.** Are according to EN 15804:2012+A1:2013, clause 6.3.7. The manufacturer-specific production data have been retrieved for 2019 from the production site. The product is only produced at one production site, in Forserum, Sweden.

The allocation is made in accordance to Product Category Rule EN 15804:2012+A1:2013. Energy, water and waste consumption in the factory is allocated to the declared unit by mass allocation.

### Cut-off criteria

General cut-off criteria are given in standard EN 15804 clause 6.3.5. In compliance with these criteria, all main raw materials and all the essential energy are included. The use of the chemical raw material on the product surface are given in a wet state and the weight of the final product is given in a dry state, which influences mass balance difference in 0.02 %. This cut-off rule is not valid for hazardous materials and substances.

## LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			GWP	ODP	AP	EP	POCP	ADPE	ADPF
			kg CO <sub>2</sub> equiv.	kg CFC 11 equiv.	kg SO <sub>2</sub> equiv.	kg (PO <sub>4</sub> ) <sup>3-</sup> equiv.	kg C <sub>2</sub> H <sub>4</sub> equiv.	kg Sb equiv.	MJ, net calorific value.
Product stage	Raw material supply	A1	-3.61e+1	3.18e-6	2.98e-1	9.88e-2	4.77e-2	5.27e-4	7.66e+2
	Transport	A2	1.59+1	2.92e-6	5.39e-2	1.41e-2	9.30e-3	4.17e-5	2.40e+2
	Manufacturing	A3	3.65e+0	3.58e-6	1.20e-2	5.06e-2	1.78e-2	2.21e-5	3.44e+2
	Total (of product stage)	A1-3	-1.65e+1	9.68e-6	4.72e-1	1.63e-1	7.48e-2	7.89e-4	1.35e+3
Construction process stage	Transport	A4	MND	MND	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND	MND	MND
End of life	Deconstruction, demolition	C1	MND	MND	MND	MND	MND	MND	MND
	Transport	C2	MND	MND	MND	MND	MND	MND	MND
	Waste processing	C3	MND	MND	MND	MND	MND	MND	MND
	Disposal	C4	MND	MND	MND	MND	MND	MND	MND
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	MND	MND	MND	MND	MND	MND	MND

GWP = Global Warming Potential;  
 ODP = Ozone Depletion Potential;  
 AP = Acidification Potential for Soil and Water;  
 EP = Eutrophication Potential;

POCP = Formation potential of tropospheric Ozone;  
 ADPE = Abiotic Depletion Potential – Elements;  
 ADPF = Abiotic Depletion Potential – Fossil Fuels;

## LCA Results (continued)

Parameters describing resource use, primary energy			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	9.58e+2	4.10e+2	1.37e+3	8.29e+2	9.72e+1	9.26e+2
	Transport	A2	3.19e+0	1.18e-5	3.19e+0	2.38e+2	0.00e+0	2.38e+2
	Manufacturing	A3	5.07e+2	1.99e-5	5.07e+2	5.06e+2	0.00e+0	5.06e+2
	Total (of product stage)	A1-3	1.45e+3	4.10e+2	1.88e+3	1.57e+3	9.72e+1	1.67e+3
Construction process stage	Transport	A4	MND	MND	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND	MND	MND
End of life	Deconstruction, demolition	C1	MND	MND	MND	MND	MND	MND
	Transport	C2	MND	MND	MND	MND	MND	MND
	Waste processing	C3	MND	MND	MND	MND	MND	MND
	Disposal	C4	MND	MND	MND	MND	MND	MND
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	MND	MND	MND	MND	MND	MND

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource

## LCA Results (continued)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
Product stage	Raw material supply	A1	0.00e+0	0.00e+0	0.00e+0	7.87e-1
	Transport	A2	0.00e+0	0.00e+0	0.00e+0	5.20e-2
	Manufacturing	A3	0.00e+0	0.00e+0	0.00e+0	4.45e-1
	Total (of product stage)	A1-3	0.00e+0	0.00e+0	0.00e+0	1.28e+0
Construction process stage	Transport	A4	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND
End of life	Deconstruction, demolition	C1	MND	MND	MND	MND
	Transport	C2	MND	MND	MND	MND
	Waste processing	C3	MND	MND	MND	MND
	Disposal	C4	MND	MND	MND	MND
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	MND	MND	MND	MND

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water



## LCA Results (continued)

Other environmental information describing waste categories			HWD	NHWD	RWD
			kg	kg	kg
Product stage	Raw material supply	A1	1.77e+0	4.22e+0	1.58e-3
	Transport	A2	1.00e-1	1.11e+1	1.65e-3
	Manufacturing	A3	4.12e-1	1.62e+0	3.34e-3
	Total (of product stage)	A1-3	2.28e+0	1.70e+1	6.58e-3
Construction process stage	Transport	A4	MND	MND	MND
	Construction	A5	MND	MND	MND
Use stage	Use	B1	MND	MND	MND
	Maintenance	B2	MND	MND	MND
	Repair	B3	MND	MND	MND
	Replacement	B4	MND	MND	MND
	Refurbishment	B5	MND	MND	MND
	Operational energy use	B6	MND	MND	MND
	Operational water use	B7	MND	MND	MND
End of life	Deconstruction, demolition	C1	MND	MND	MND
	Transport	C2	MND	MND	MND
	Waste processing	C3	MND	MND	MND
	Disposal	C4	MND	MND	MND
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	MND	MND	MND

HWD = Hazardous waste disposed;  
 NHWD = Non-hazardous waste disposed;  
 RWD = Radioactive waste disposed

## LCA Results (continued)

Other environmental information describing output flows – at end of life						
			CRU	MFR	MER	EE
			kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Transport	A2	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Manufacturing	A3	0.00e+0	1.07e-1	2.62e+0	0.00e+0
	Total (of product stage)	A1-3	0.00e+0	1.07e-1	2.62e+0	0.00e+0
Construction process stage	Transport	A4	MND	MND	MND	MND
	Construction	A5	MND	MND	MND	MND
Use stage	Use	B1	MND	MND	MND	MND
	Maintenance	B2	MND	MND	MND	MND
	Repair	B3	MND	MND	MND	MND
	Replacement	B4	MND	MND	MND	MND
	Refurbishment	B5	MND	MND	MND	MND
	Operational energy use	B6	MND	MND	MND	MND
	Operational water use	B7	MND	MND	MND	MND
End of life	Deconstruction, demolition	C1	MND	MND	MND	MND
	Transport	C2	MND	MND	MND	MND
	Waste processing	C3	MND	MND	MND	MND
	Disposal	C4	MND	MND	MND	MND
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	MND	MND	MND	MND

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy

## Summary, comments and additional information

### Company introduction

JELD-WEN (NYSE listed), established in 1960, is one of the world's largest manufacturers of doors and windows with production facilities in 20 countries, primarily in North America, Europe and Australia. Headquartered in North Carolina, USA. JELD-WEN designs, manufactures and distributes a wide range of interior doors, exterior doors, wooden, vinyl and aluminum windows, as well as related products for new buildings and the renovation market, for both private and commercial buildings.

JELD-WEN is recognized in the production of energy-saving products and has been an ENERGY STAR® partner since 1998. Our products are marketed globally under the brand name JELD-WEN, but also under several market-leading regional brand names such as SWEDOOR® and DANA® in Europe and Corinthian®, Stegbar® and Trend® in Australia.

### Forest Stewardship Council (FSC) Certification

JELD-WEN holds FSC multi-site certificate since 2011. Majority of JELD-WEN products on the European market are available as FSC and PEFC certified.

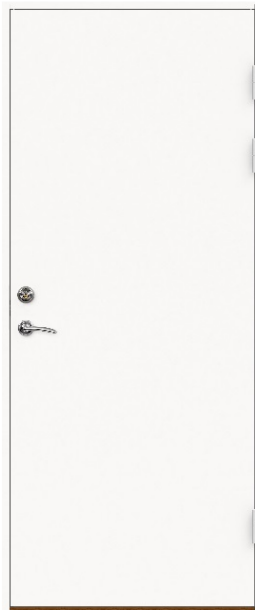


Figure 1 PL white door leaf with frameset.

## References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A1:2013. London, BSI, 2013.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.