

Statement of Verification

BREG EN EPD No.: 000360

Issue 02

This is to verify that the

Environmental Product Declaration

provided by:

Dialight

is in accordance with the requirements of:

EN 15804:2012+A1:2013

and

BRE Global Scheme Document SD207


This declaration is for:

Vigilant LED Bulkhead light



Company Address

Leaf C, Level 36, Tower 42
25 Old Broad Street
London
EC2N 1HQ

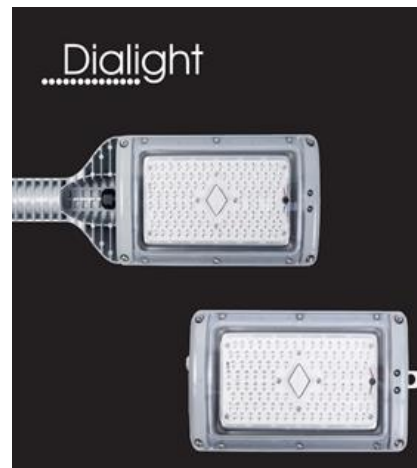

Signed for BRE Global Ltd

Emma Baker
Operator

17 December 2021
Date of this Issue

11 May 2021
Date of First Issue

10 May 2026
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit www.greenbooklive.com/terms).

To check the validity of this statement of verification please, visit www.greenbooklive.com/check or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.
T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: Enquiries@breglobal.com



Environmental Product Declaration

EPD Number: 000360

General Information

EPD Programme Operator	Applicable Product Category Rules
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012+A1:2013
Commissioner of LCA study	LCA consultant/Tool
Dialight plc Leaf C, Level 36, Tower 42 25 Old Broad Street London EC2N 1HQ	BRE LINA v2.0
Declared/Functional Unit	Applicability/Coverage
1 x Vigilant LED Bulkhead light unit weighing 6.3 kg	Manufacturer specific product.
EPD Type	Background database
Cradle to Gate	ecoinvent v3.2
Demonstration of Verification	
CEN standard EN 15804 serves as the core PCR ^a	
Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
(Where appropriate ^b)Third party verifier: Nigel Jones	
a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)	
Comparability	
Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A1:2013. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A1:2013 for further guidance	

Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
					Related to the building fabric					Related to the building						
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: Ticks indicate the Information Modules declared.

Manufacturing site

1666 Lorong Perusahaan Maju 8,
13600 Perai,
Pulau Pinang,
Malaysia

Construction Product

Product Description

The intended purposes for Vigilant LED Bulkhead light units are for any industrial retrofit or greenfield environment including: walkway illumination, general plant/area lighting, stairways and platforms and minor roadways. The walkways, stairways and platforms can be on board marine vessels as well as on dry land.

Technical Information

Standard	Value, Unit
IEC 60509:1989 Rating IP66	Rated as "dust tight" and protected against heavy seas or powerful jets of water
IEC 60509:1989 Rating IP67	Rated as "dust tight" and protected against immersion for 30 minutes at depths 150mm - 1000mm
IEC 62262:2002 Rating IK10	Shell body can withstand the drop of a load of 5 kg from a height of 40 cm, with the impact energy reaching 20 J.
Certification Mark	CE, UL, RCM (depending on target market)
IES Rating L70	150,000 hours at 65 degrees C ambient


Main Product Contents

Material/Chemical Input	%
Aluminium Machined Housing	65.1
Power Supply	25.4
Lens	4.8
Light Engine	1.6
Cables	1.6
Powder Coat	1.6

Manufacturing Process

The lights are made in Penang, Malaysia (certificate of origin is Malaysian) using sub-components that are designed and manufactured to Dialight's specification. Where applicable, the potting of power supplies is carried out in-house. The assembly process is labour intensive and requires little specialist equipment in order to make a completed unit. The operator places the relevant (and tested) sub-components into the aluminium housing in accordance with the product specification. All completed units have to undergo a series of testing procedures to ensure unit quality and also to ensure it meets the requirements of the relevant electrical standard for the target market. Once they have passed all tests, the units are packed and shipped.

Process flow diagram

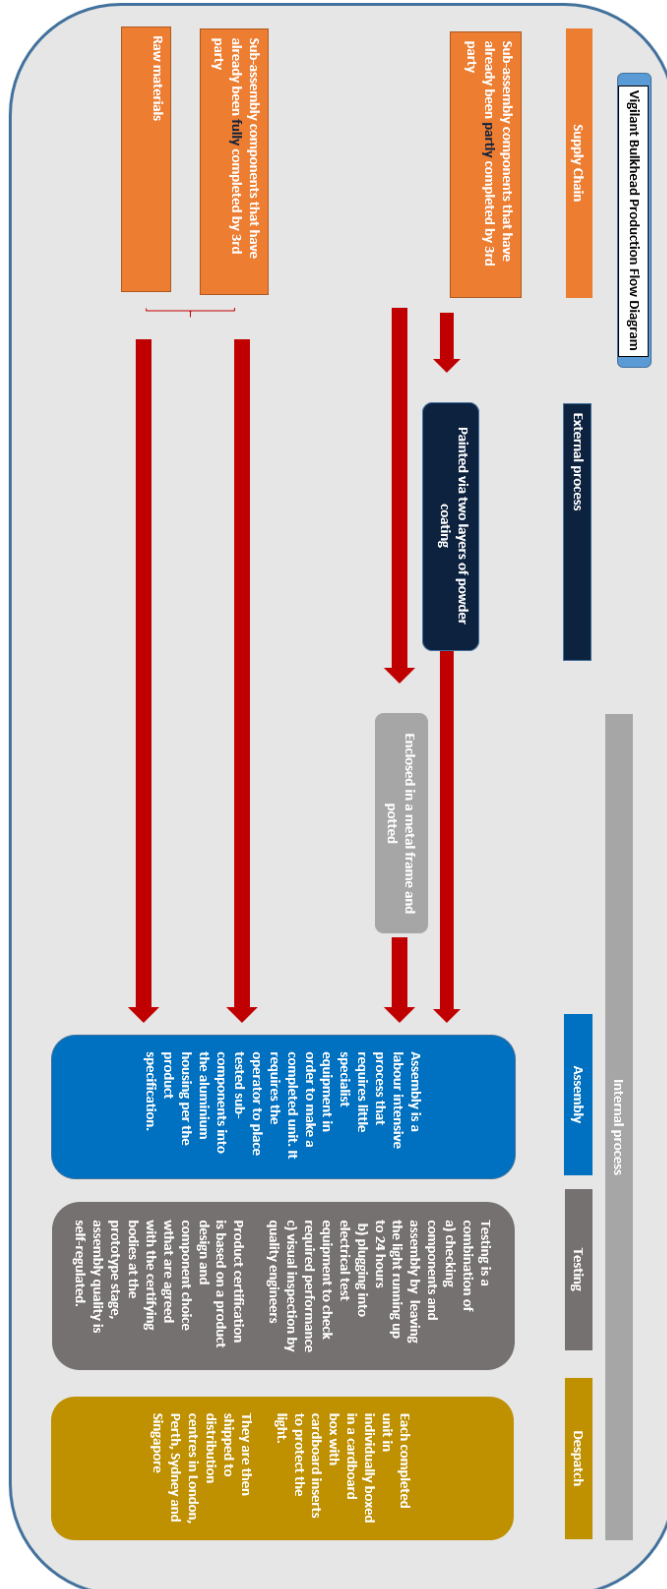

Construction Installation

Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation requirement. It is the exclusive responsibility of the contractor, installer and/or end-user to:

- (a) determine the suitability of the product for its intended application;
- (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations.

Use Information

Vigilant LED Bulkhead is an industrial LED light for use in walkways, stairwells, subways, escape routes. It comes with the option for battery back-up in case of power failure and can be wall or pole mounted.

End of Life

Vigilant Bulkhead products are warranted for 10 years but in reality, they continue to operate for considerably longer. Because of this, there is no recommended disposal route. The main avenue for recycling would be in the smelting and recasting of the aluminium body which is likely to be cost effective. The electrical components, particularly the potted power supply would be unlikely to be economically viable to recycle.

Life Cycle Assessment Calculation Rules

Declared unit description

1 x Vigilant LED Bulkhead light unit weighing 6.3 kg

System boundary

This is a cradle-to-gate LCA, reporting all production life cycle stages of modules A1 to A3 in accordance with EN 15804:2012+A1:2013.

Data sources, quality and allocation

Vigilant LED Bulkhead is an industrial LED light system. Two models are manufactured – a standard model weighing 6.3 kg (7.0 kg packed) and a pole mounted model weighing 8.1 kg (8.8 kg packed). The lights are assessed without the battery and the calculation is based on the 6.3 kg model.

The products are assembled at Dialight's facility in Penang, Malaysia utilising sub-components manufactured to Dialight's specification by third-parties. The data supplied relates to the Penang site and as it is a new product it covers a 4 month period only – 1st September to 31st December 2020. The site manufactures other products in addition to Vigilant LED Bulkhead and values for energy, water, waste and wastewater have been allocated by piece (unit) as a proportion of total number of pieces produced in the period according to the provisions of the BRE PCR PN514 and EN 15804.

Secondary data has been drawn from the BRE LINA database v2.0.79 and the background LCI datasets are based on ecoinvent v3.2.

Cut-off criteria

All raw materials and energy input to the manufacturing process have been included, except for direct emissions to air, water and soil, which are not measured. The inventory process in this LCA includes all data related to raw material, packaging material and consumable items, and the associated transport to the

manufacturing site. Process energy and water use and general waste are included. As the process is an assembly line there is no direct production waste as faulty components are returned to the supplier.

LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			GWP	ODP	AP	EP	POCP	ADPE	ADPF
			kg CO ₂ equiv.	kg CFC 11 equiv.	kg SO ₂ equiv.	kg (PO ₄) ³⁻ equiv.	kg C ₂ H ₄ equiv.	kg Sb equiv.	MJ, net calorific value.
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	246	0.00002	1.98	1.78	0.266	0.0534	3390

GWP = Global Warming Potential;
 ODP = Ozone Depletion Potential;
 AP = Acidification Potential for Soil and Water;
 EP = Eutrophication Potential;

POCP = Formation potential of tropospheric Ozone;
 ADPE = Abiotic Depletion Potential – Elements;
 ADPF = Abiotic Depletion Potential – Fossil Fuels;

LCA Results (continued)

Parameters describing resource use, primary energy			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	316	0.00884	316	3590	0	3590

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;
 PERM = Use of renewable primary energy resources used as raw materials;
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;
 PENRM = Use of non-renewable primary energy resources used as raw materials;
 PENRT = Total use of non-renewable primary energy resource

LCA Results (continued)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m ³
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	0.00E+00	0.00E+00	0.00E+00	3.8

SM = Use of secondary material;
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;
FW = Net use of fresh water

LCA Results (continued)

Other environmental information describing waste categories						
			HWD	NHWD	RWD	
			kg	kg	kg	
Product stage	Raw material supply	A1	AGG	AGG	AGG	
	Transport	A2	AGG	AGG	AGG	
	Manufacturing	A3	AGG	AGG	AGG	
	Total (of product stage)	A1-3	14.3	29.2	0.0486	

HWD = Hazardous waste disposed;
NHWD = Non-hazardous waste disposed;
RWD = Radioactive waste disposed

LCA Results (continued)

Other environmental information describing output flows – at end of life						
			CRU	MFR	MER	EE
			kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	0.00E+00	0.904	0.00E+00	0.00E+00

CRU = Components for reuse;
MFR = Materials for recycling

MER = Materials for energy recovery;
EE = Exported Energy

References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A1:2013. London, BSI, 2013.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.