

## Statement of Verification

BREG EN EPD No.: 000720

Issue 01

This is to verify that the  
**Environmental Product Declaration**  
provided by:  
**GCP Applied Technologies**



is in accordance with the requirements of:  
**EN 15804:2012+A2:2019**  
and  
**BRE Global Scheme Document SD207**

This declaration is for:  
**1m<sup>2</sup> of Preprufe® 800PA and Preprufe® 800PA LT waterproofing membrane products installed over a 100-year period**

### Company Address

GCP Applied Technologies  
487/488 Ipswich Road  
Slough  
Berkshire  
SL1 4EP



Hayley Thomson  
Operator

27 November 2025  
Date of this Issue

27 November 2025  
Date of First Issue

26 November 2030  
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit [www.greenbooklive.com/terms](http://www.greenbooklive.com/terms).  
To check the validity of this statement of verification please, visit [www.greenbooklive.com/check](http://www.greenbooklive.com/check) or contact us.  
BRE Global Ltd., Garston, Watford WD25 9XX.  
T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: [Enquiries@breglobal.com](mailto:Enquiries@breglobal.com)





## Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
					Related to the building fabric					Related to the building						
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>																

Note: Ticks indicate the Information Modules declared.

## Manufacturing site(s)

350 Magnolia Drive  
Mt. Pleasant, Tennessee 38474  
USA

## Construction Product:

### Product Description

GCP Applied Technologies (“GCP”) PREPRUFE® 800PA is a cold-applied, self-adhesive waterproofing membrane, composed of a cross-laminated HDPE film, and a synthetic non-bituminous adhesive. PREPRUFE® 800PA incorporates the PREPRUFE® Advanced Bond Technology™. It is an advanced, self-adhesive PREPRUFE® Membrane for protection of below ground structures.

This EPD covers the products Preprufe® 800PA and Preprufe® 800PA LT waterproofing membranes. The results are based on a production-weighted average, as all products share a similar composition and are manufactured using the same process.

### Technical Information

Property	Preprufe® 800PA and Preprufe® 800PA LT
Peel Strength at 23°C, min (ASTM D 903)	3.2 N/mm
Visible defects (EN1850-2)	None
Straightness (EN1848-2)	Pass
Length (EN1848-2)	35.1m ± 0.25
Thickness (EN1849-2)	0.8mm ± 0.07
Width Carrier Sheet (EN1848-2)	1.206m ± 0.01
Mass per unit area net of release paper (EN1849-2)	735 g/m <sup>2</sup> ± 50
Water tightness to liquid water (at 60 kPa) (EN1928)	Pass
Resistance to impact (AI board) (EN12691)	≥ 150 mm
Resistance to tearing (Nail Shank)- unreinforced sheets (EN12310-1)	≥ 155 N

Property	Preprufe® 800PA and Preprufe® 800PA LT
Joint Strength (N/50mm) MLV (EN12317-2)	≥ 250 for Preprufe® 800PA and ≥ 220 for Preprufe® 800PA LT
Water vapour transmission (EN1931)	380.000 μ (= sD/d) ± 30%
Durability of water tightness against ageing/degradation (at 60 kPa) (EN1296 / EN1928 Method B)	Pass
Durability of water tightness against chemicals (at 60 kPa) (EN 1847 Method B / EN 1928 Method B)	Pass
Compatibility with bitumen (EN1548)	Pass
Resistance to static loading (EN12730)	≥ 20 - Pass
Tensile properties – unreinforced sheets (EN 12311-2 Method A)	Longitudinal ≥ 430 N/50mm Transversal ≥ 430 N/50mm
Tensile properties – unreinforced sheets - elongation (%) (EN 12311-2 Method A)	Longitudinal ≥ 180% Transversal ≥ 180%
Reaction to fire (Class; test conditions) (EN 13501-1)	E

For more information, please visit <https://gcpat.com/en/solutions/products/preprufe-800pa-post-applied-waterproofing-membrane/preprufe-800pa-post-applied> or please contact the GCP technical team.




### Main Product Contents

Preprufe® 800PA and Preprufe® 800PA LT Material/Chemical Input	%
Proprietary hot melt adhesive	40-60
HDPE	30-50
PET	5-10

## Manufacturing Process

Heated adhesive is coated onto a release liner. A film is laminated, and the product is cut to length, rolled, and boxed for shipment.

### Process flow diagram

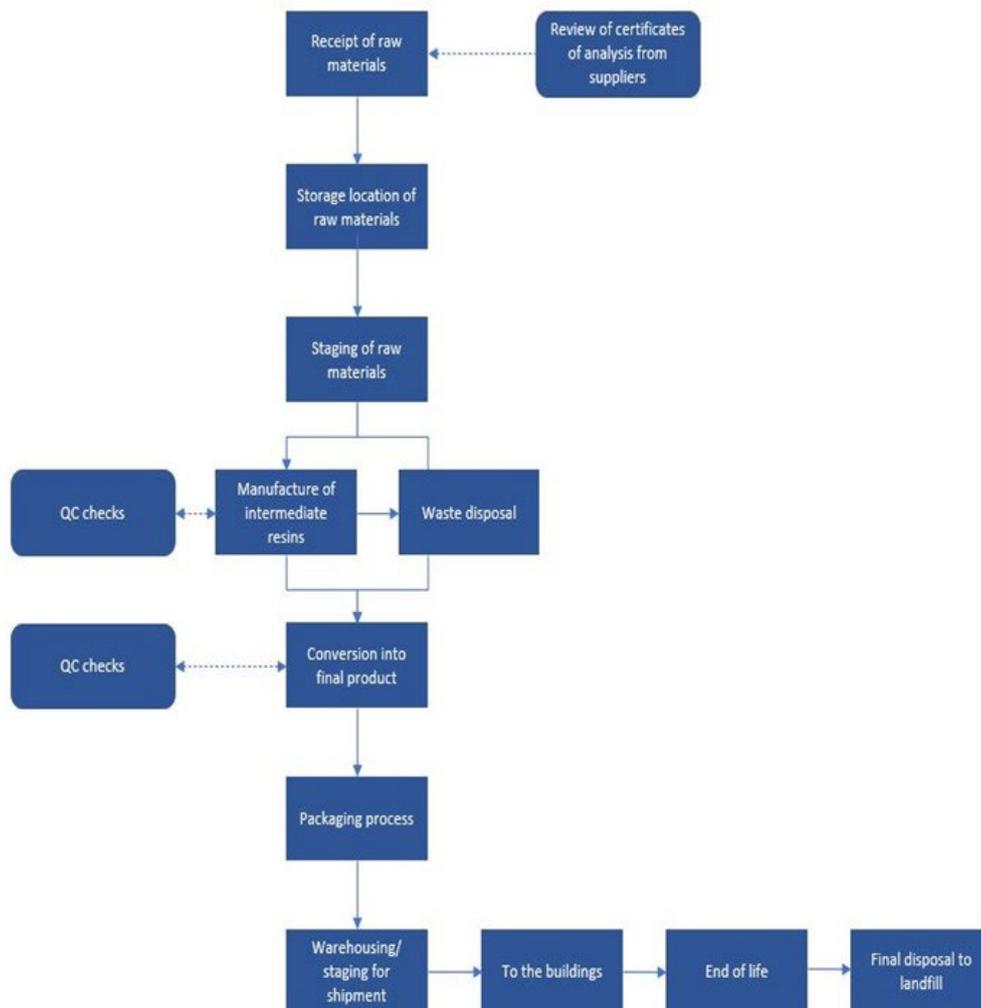

## Construction Installation

Preprufe® is a pre-applied 1.2 m wide membrane on rolls for adhesive bond to freshly poured concrete, installed without heat or open flame, prior to the installation and fixing of steel reinforcement and the concrete pour. The overlaps of the membrane sheets are bonded by means of the prefabricated self-adhesive edges on the membrane sheets. Roll ends and details are bonded and sealed with Preprufe accessory tape. Due to the overlaps of the membrane sheets the average consumption of membrane per 1m<sup>2</sup> is approx. plus 7.5%. Installation work shall be carried out only by GCP trained applicators/contractors. For further details refer to data sheets on <https://gcpat.com/en/solutions/products/preprufe-membrane-pre-applied-waterproofing-solutions>

## Use Information

Preprufe® 800PA is a post-applied 1.2 m wide membrane on rolls for adhesive bonding to primed concrete walls and foundations, installed without heat or open flame. After completion of the surface preparation and priming, the membranes shall be applied by peeling back the protective release paper and applying the adhesive face onto the prepared surface. Adjacent rolls are aligned using printed lines and overlapped 50 mm minimum at side and ends and well rolled with a firm pressure, using a lap roller to ensure complete adhesion and continuity between the layers. Once the membrane is applied, cover with a protection board as soon as possible. Installation work shall be carried out only by GCP trained applicators/contractors..

## End of Life

When a building is demolished at the end of its service life, the Preprufe® system bonded to the concrete cannot be separated and remains part of the construction rubble. This is in general taken to landfill. Preprufe® is only a minor part of the whole volume during demolition of the concrete structure. Therefore, no other steps are considered as necessary with the exception for transportation to a landfill.

If the client and wrecking contractor are required according to local regulations to separate the demolished concrete from steel reinforcement and other embedded items, the Preprufe® will remain bonded to the concrete, which can be grinded to smaller concrete particles and used as backfilling material or substrate in other construction work.

## Life Cycle Assessment Calculation Rules

### Declared / Functional unit description.

1m<sup>2</sup> of Preprufe® 800PA and Preprufe® 800PA LT waterproofing membrane products installed over a 100-year period.

### System boundary

This is a cradle-to-grave EPD of GCP's Preprufe® 800PA and Preprufe® 800PA LT waterproofing membrane products, manufactured by GCP in the United States and distributed in the UK. It follows the modular design defined in EN 15804:2012+A2:2019 and BRE PCR EN 15804+A2 PN 514 Rev 3.1 which covers product stage impacts (A1 to A3), construction/installation (A4 to A5), Use stage (B1-B7) and End of life modules (C1-C4), and module D.

### Data sources, quality and allocation

The LCA analysis has been conducted for 1 m<sup>2</sup> of Preprufe® 800PA and Preprufe® 800PA LT waterproofing membrane products, with a manufactured weight of 0.895 kg/m<sup>2</sup> based on the average production quantity. Therefore, the average results are included in this EPD.

Manufacturer-specific data from GCP covering a production period from 1st January to 31st July 2021 has been used for this EPD. Figures for input materials and packaging were uplifted to account for production waste. Only seven months of production data was used for the LCA modelling due to limited data availability and the manufacturer has confirmed that the manufacturing process and the electricity used for the manufacturing remains the same.

GCP manufacture other products at the Mt. Pleasant site. Allocation by mass has been used to calculate the input energy flows (electricity and natural gas), packaging, ancillary, emissions to air and water and waste flows per selected products according to the provisions of the BRE PCR PN514 and EN 15804+A2. Product formulations including ancillary and packaging data were combined with allocated manufacturing data to calculate the cradle to gate LCA profiles for the Preprufe® 800 products. Since both products Preprufe® 800 have the same weight per square metre, a production weighted average has been calculated for all entries. During the LCA modelling, some datasets were not available in ecoinvent 3.8; therefore, suitable proxy datasets were used.

Preprufe® 800PA and Preprufe® 800PA LT products form 0.33% of total production at the site. Upon checking the mass balance during the data entry, the raw material input quantities are less than the production output because the waste quantities is based on the estimation rather than actual measurement, therefore the uplift has been performed to the raw material input. The difference in weight between manufactured and installed weights is due to the release paper being removed during installation.

Secondary data has been obtained for all other upstream and downstream processes that are beyond the control of the manufacturer (i.e., raw material production) from the ecoinvent 3.8 database. All ecoinvent datasets are complete within the context used and conform to the system boundary and the criteria for the exclusion of inputs and outputs, according to the requirements specified in EN15804.

Quality Level	Geographical representativeness	Technical representativeness	Time representativeness
Very Good	Data from area under study.	Data from processes and products under study. Same state of technology applied as defined in goal and scope (i.e., identical technology).	There is approximately 1-2 years between the Ecoinvent LCI reference year, and the time period for which the LCA was undertaken.

Country specific datasets have been selected from the ecoinvent LCI for this LCA. Manufacturer uses the national grid electricity and natural gas for production; therefore, the national grid electricity and natural gas (RoW) dataset has been from Ecoinvent 3.8 for the LCA modelling. The GWP carbon footprint for using 1 kWh of Electricity – US consumption mix is 0.549 in kgCO<sub>2</sub>e/kWh and the GWP carbon footprint for using 1kWh of Natural gas (RoW) is 0.256 kgCO<sub>2</sub>e/kWh. The quality level of time representativeness is also Very Good as the background LCI datasets are based on ecoinvent v3.8 which was compiled in 2021. Therefore, there is less than 5 years between the ecoinvent LCI reference year and the time period for which the LCA was undertaken.

### Cut-off criteria

No inputs or outputs have been excluded and all raw materials, packaging and transport, energy, water use, emissions to air and wastes, are included. Direct emissions to water and soil are not measured.

## LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			GWP-total	GWP-fossil	GWP-biogenic	GWP-luluc	ODP	AP	EP-freshwater
			kg CO <sub>2</sub> eq	kg CFC11 eq	mol H <sup>+</sup> eq	kg (PO <sub>4</sub> ) <sup>3-</sup> eq			
Product stage	Raw material supply	A1	3.11E+00	2.58E+00	-6.42E-01	1.18E+00	1.52E-06	1.14E-02	4.60E-04
	Transport	A2	2.41E-01	2.41E-01	2.05E-04	9.46E-05	5.57E-08	9.78E-04	1.55E-05
	Manufacturing	A3	2.92E-01	3.46E-01	-5.78E-02	1.22E-03	2.88E-08	1.25E-03	1.68E-04
	Total	A1-3	3.65E+00	3.16E+00	-6.99E-01	1.18E+00	1.61E-06	1.36E-02	6.44E-04
Construction process stage	Transport	A4	2.07E-01	2.06E-01	1.22E-04	9.98E-05	4.59E-08	2.42E-03	1.15E-05
	Construction	A5	5.28E-01	4.87E-01	1.17E-02	2.96E-02	4.12E-07	1.52E-03	3.57E-05
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>									
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	1.04E-03	1.04E-03	8.88E-07	4.09E-07	2.41E-10	4.23E-06	6.71E-08
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	1.05E-01	1.05E-01	6.78E-05	1.07E-05	2.89E-09	8.60E-05	1.58E-06
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	-9.32E-04	-9.17E-04	6.25E-17	-7.75E-06	-1.19E-10	-6.79E-06	-4.60E-07

GWP-total = Global warming potential, total;  
 GWP-fossil = Global warming potential, fossil;  
 GWP-biogenic = Global warming potential, biogenic;  
 GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;  
 AP = Acidification potential, accumulated exceedance; and  
 EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			EP-marine	EP-terrestrial	POCP	ADP-mineral & metals	ADP-fossil	WDP	PM
			kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m <sup>3</sup> world eq deprived	disease incidence
Product stage	Raw material supply	A1	4.95E-03	2.23E-02	9.21E-03	1.59E-05	6.09E+01	1.20E+00	1.32E-07
	Transport	A2	2.94E-04	3.22E-03	9.86E-04	8.38E-07	3.64E+00	1.64E-02	2.08E-08
	Manufacturing	A3	6.31E-04	2.98E-03	8.22E-04	9.98E-07	5.23E+00	1.41E-01	1.64E-08
	Total	A1-3	5.88E-03	2.85E-02	1.10E-02	1.78E-05	6.98E+01	1.36E+00	1.69E-07
Construction process stage	Transport	A4	6.30E-04	6.96E-03	1.90E-03	6.00E-07	2.99E+00	1.19E-02	1.47E-08
	Construction	A5	4.48E-04	3.93E-03	1.21E-03	1.52E-06	4.43E+00	8.02E-02	1.33E-08
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>									
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	1.27E-06	1.39E-05	4.26E-06	3.62E-09	1.57E-02	7.08E-05	8.99E-11
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	1.91E-03	3.11E-04	1.11E-04	3.33E-08	2.29E-01	1.01E-02	1.62E-09
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	-2.21E-06	-2.30E-05	-7.96E-06	-5.32E-09	-1.59E-02	-5.13E-04	-3.19E-10

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;  
 EP-terrestrial = Eutrophication potential, accumulated exceedance;  
 POCP = Formation potential of tropospheric ozone;  
 ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer;  
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption; and  
 PM = Particulate matter.

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

			Parameters describing environmental impacts				
			IRP	ETP-fw	HTP-c	HTP-nc	SQP
			kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless
Product stage	Raw material supply	A1	1.01E-01	5.11E+01	1.50E-09	2.99E-08	6.23E+01
	Transport	A2	1.87E-02	2.84E+00	9.20E-11	2.98E-09	2.50E+00
	Manufacturing	A3	6.33E-02	5.93E+00	1.61E-10	3.10E-09	9.36E+00
	Total	A1-3	1.84E-01	5.99E+01	1.75E-09	3.60E-08	7.41E+01
Construction process stage	Transport	A4	1.49E-02	2.21E+00	9.11E-11	2.14E-09	1.66E+00
	Construction	A5	1.32E-02	3.89E+00	1.68E-10	2.92E-09	2.56E+00
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>							
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	8.09E-05	1.23E-02	3.98E-13	1.29E-11	1.08E-02
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	1.12E-03	4.78E-01	7.67E-12	2.03E-10	5.32E-01
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	-2.29E-04	-3.19E-02	-2.49E-12	-3.07E-11	-6.33E-01

IRP = Potential human exposure efficiency relative to U235;  
ETP-fw = Potential comparative toxic unit for ecosystems;  
HTP-c = Potential comparative toxic unit for humans;

HTP-nc = Potential comparative toxic unit for humans; and  
SQP = Potential soil quality index.

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use, primary energy			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	8.68E+00	4.36E+00	1.30E+01	3.54E+01	2.62E+01	6.16E+01
	Transport	A2	5.13E-02	0.00E+00	5.13E-02	3.58E+00	0.00E+00	3.58E+00
	Manufacturing	A3	1.16E-01	1.89E+00	2.00E+00	-4.12E-01	2.60E+00	2.18E+00
	Total	A1-3	8.85E+00	6.25E+00	1.51E+01	3.86E+01	2.88E+01	6.74E+01
Construction process stage	Transport	A4	3.69E-02	0.00E+00	3.69E-02	2.93E+00	0.00E+00	2.93E+00
	Construction	A5	-1.46E+00	1.90E+00	4.39E-01	2.25E+00	2.06E+00	4.32E+00
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>								
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	2.22E-04	0.00E+00	2.22E-04	1.55E-02	0.00E+00	1.55E-02
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	4.69E-03	0.00E+00	4.69E-03	-2.73E+01	2.76E+01	2.25E-01
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	5.90E-02	-1.80E-01	-1.21E-01	-1.59E-02	0.00E+00	-1.59E-02

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;  
 PERM = Use of renewable primary energy resources used as raw materials;  
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;  
 PENRM = Use of non-renewable primary energy resources used as raw materials;  
 PENRT = Total use of non-renewable primary energy resource

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
Product stage	Raw material supply	A1	7.35E-04	0.00E+00	0.00E+00	2.82E-02
	Transport	A2	0.00E+00	0.00E+00	0.00E+00	4.06E-04
	Manufacturing	A3	9.54E-02	0.00E+00	0.00E+00	3.43E-03
	Total	A1-3	9.61E-02	0.00E+00	0.00E+00	3.21E-02
Construction process stage	Transport	A4	0.00E+00	0.00E+00	0.00E+00	2.95E-04
	Construction	A5	2.40E-03	0.00E+00	0.00E+00	1.91E-03
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>						
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	0.00E+00	0.00E+00	0.00E+00	1.75E-06
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	7.90E-05	0.00E+00	0.00E+00	2.38E-04
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	0.00E+00	0.00E+00	0.00E+00	-1.26E-05

SM = Use of secondary material;  
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;  
FW = Net use of fresh water

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing waste categories					
			HWD	NHWD	RWD
			kg	kg	kg
Product stage	Raw material supply	A1	1.77E-01	1.31E+00	7.59E-05
	Transport	A2	4.01E-03	7.13E-02	2.46E-05
	Manufacturing	A3	8.20E-03	3.41E-01	5.56E-06
	Total	A1-3	1.89E-01	1.72E+00	1.06E-04
Construction process stage	Transport	A4	3.46E-03	5.23E-02	2.04E-05
	Construction	A5	9.88E-03	1.68E-01	1.11E-05
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>					
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	1.74E-05	3.08E-04	1.07E-07
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	4.82E-04	9.04E-01	1.34E-06
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	-5.60E-05	-1.96E-03	-9.20E-08

HWD = Hazardous waste disposed;  
 NHWD = Non-hazardous waste disposed;  
 RWD = Radioactive waste disposed

## LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing output flows – at end of life								
			CRU	MFR	MER	EE	Biogenic carbon (product)	Biogenic carbon (packaging)
			kg	kg	kg	MJ per energy carrier	kg C	kg C
Product stage	Raw material supply	A1	0.00E+00	2.32E-05	7.17E-08	0.00E+00	0.00E+00	0.00E+00
	Transport	A2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Manufacturing	A3	0.00E+00	0.00E+00	7.12E-06	0.00E+00	-5.08E-05	-5.67E-02
	Total	A1-3	0.00E+00	2.32E-05	7.19E-06	0.00E+00	-5.08E-05	-5.67E-02
Construction process stage	Transport	A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Construction	A5	0.00E+00	2.07E-01	1.83E-07	0.00E+00	8.75E-03	4.62E-02
Use stage	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Replacement	B4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Refurbishment	B5	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Product End of life 100% - Landfill</b>								
End of life	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Waste processing	C3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Disposal	C4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Potential benefits and loads beyond the system boundaries	Packaging waste recycling/incineration benefits	D	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

CRU = Components for reuse;  
MFR = Materials for recycling

MER = Materials for energy recovery;  
EE = Exported Energy


## Scenarios and additional technical information

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
A4 – Transport to the building site	Distances from US plant to UK distribution including Preprufe® LT tape used for installation		
	Diesel/ 16-32 t lorry	Kg/km	0.3
	Distance:	km	1012.3
	Capacity utilisation (incl. empty returns)	%	24
	Ship distance by sea	Km	6614.4
	Ship capacity utilisation (incl. empty returns)	%	65
	Weight of transported products	Kg per roll	36
A5 – Installation in the building	Preprufe is a pre-applied 1.2 m wide membrane on rolls for adhesive bond to freshly poured concrete, installed without heat or open flame, prior to the installation and fixing of steel reinforcement and the concrete pour. The overlaps of the membrane sheets are bonded by means of the prefabricated self-adhesive edges on the membrane sheets. Roll ends and details are bonded and sealed with Preprufe accessory tape. Due to the overlaps of the membrane sheets the average consumption of membrane per 1m <sup>2</sup> is approx. plus 7.5% and cutting waste and loss of material, between 1 - 2.5%, depending on geometry of building structure and necessary detailing. For this analysis, the cutting waste of 2.5% has been taken as a representative.		
	Preprufe® LT tape	kg	0.0234
	Preprufe® waterproofing membrane waste at installation	%	2.5
	Transport of installation waste to landfill: Diesel/ 16-32 t lorry	kg/km	0.3
	Distance	km	7
	Capacity utilisation (incl. empty returns)	%	24
B1 - Use B2 – Maintenance B3 – Repair B4 – Replacement B5 – Refurbishment	Preprufe® is a fully bonded waterproofing membrane for below ground waterproofing of building structures. Uniquely, the membrane develops a continuous adhesive bond to concrete poured against it. If the Preprufe® system is properly and correctly installed as per GCP instructions, no maintenance, repair, or replacement is required during the service life of the structure. The highly durable, robust, and extremely reliable feature of the Preprufe® system will limit any repair work to a minimum, if membrane damage occurs. The fully bonded membrane will prevent any water migration and between membrane and the concrete structure in the event of puncturing or damaging the membrane. Thus, no scenario for repair work is defined.		
Reference service life	According to the BBA Agreement Certificate 97/3325 the service life for the Preprufe® system is stated for the lifetime of the structure. PrePrufe® is based on a highly durable HDPE carrier film with lifetime expectations > 100 years in service. Therefore, at least a 100-year building service life can be assumed.		

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
C1 – Deconstruction	When a building is demolished at the end of its service life, the Preprufe system bonded to the concrete cannot be separated and remains part of the construction rubble. This is in general taken to landfill. Preprufe is only a minor part of the whole volume during demolition of the concrete structure. Therefore, no other steps are considered as necessary with the exception for a transportation to a landfill.		
	If the client and demolition contractor are required according to local regulations to separate the demolished concrete from steel reinforcement and other embedded items, the Preprufe will remain bonded to the concrete, which can be grinded to smaller concrete particles and used as backfilling material or substrate in other construction work.		
C2 – Transportation	It's assumed as 100% of the product is recovered at the demolition site.		
	Distance calculated is 7Km based on distance of a middle-sized landfill from the centre of London (where major projects are located).		
	Diesel/ 16-32 t lorry	kg/km	100% of PrePrufe membrane is presumed to be in landfill.
	Distance	km	7
	Capacity utilisation (incl. empty returns)	%	26
C3 – Waste processing	The worst-case end of life scenario has been assumed i.e., 100% of the product waste will be landfilled at the end of life without any pre-processing. Therefore, no impacts on C3 and module D benefits		
	C4 – Disposal	100% of PrePrufe membrane is presumed to be in landfill.	kg/m <sup>2</sup>
Module D	100% of the product will be landfilled therefore no Module D benefits		
	The Module D benefits beyond the system boundaries have been calculated based on the packaging waste recycled at the construction site during product installation.		
	Cardboard waste to recycling	kg	0.106
	Wood waste to incineration	kg	0.018
	Polyethylene waste to incineration	kg	0.019
	Plastic waste to incineration	kg	0.088

## Interpretation of results

The bulk of the environmental impacts and primary energy demand are attributed to the upstream manufacturing process, covered by information modules A1-A3 of EN15804:2012+A2:2019. The below chart illustrates the average the GWP contributions of various processes per square meter, with polyethylene production (A1), adhesive, and co-polymer production contributing most of the impacts at the product manufacturing stage A1. Transport by lorry (A4) also contributes significantly, while emissions from treatment of waste plastic, electricity use, PET production, sea transport, natural gas usage for production are comparatively lower. Overall, production processes in stage A1 dominate the GWP impact, highlighting the material manufacturing phase as the key contributor.

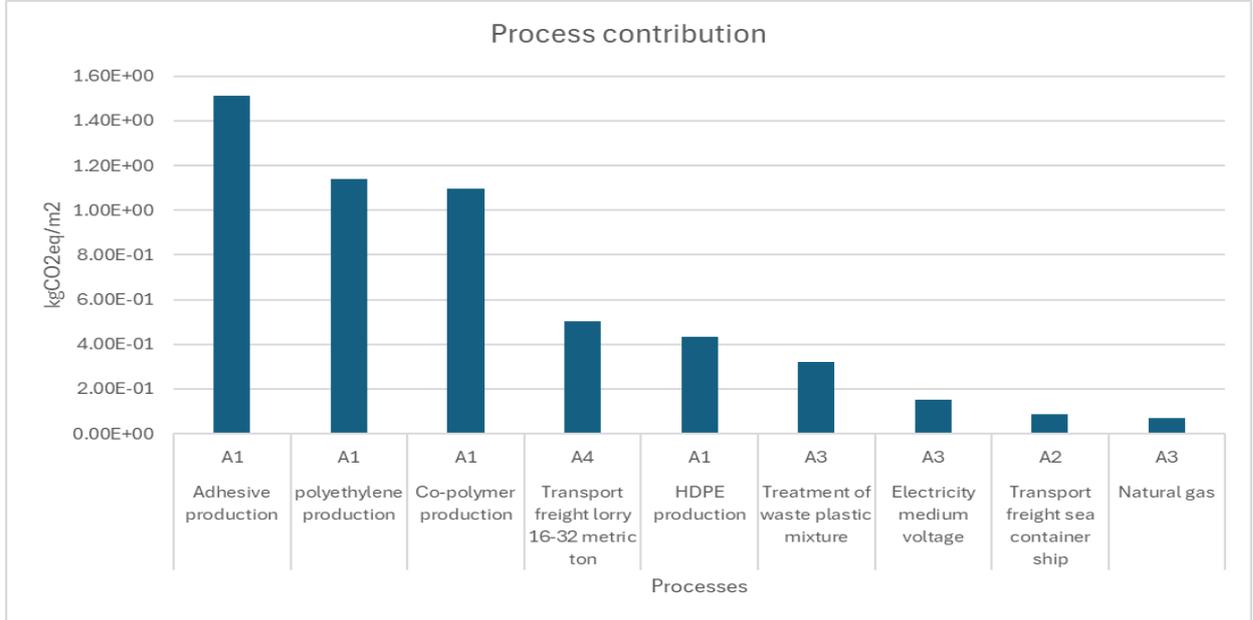

## References

- BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A2:2019. London, BSI, 2019.
- BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.
- BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.
- BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.
- EN 1849-2:2019 Flexible sheets for waterproofing - Determination of thickness and mass per unit area - Part 2: Plastics and rubber sheets for roof waterproofing
- BS EN 1928:2000 Flexible sheets for waterproofing. Bitumen, plastic and rubber sheets for roof waterproofing. Determination of watertightness
- BS EN 1928:2000 Flexible sheets for waterproofing. Bitumen, plastic and rubber sheets for roof waterproofing. Determination of watertightness
- EN 12691:2018 Flexible sheets for waterproofing - Bitumen, plastic and rubber sheets for roof waterproofing - Determination of resistance to impact
- BS EN 12310-1:2000 Flexible sheets for waterproofing. Determination of resistance to tearing (nail shank) - Bitumen sheets for roof waterproofing
- EN 12317-2:2010 Flexible sheets for waterproofing - Determination of shear resistance of joints - Part 2: Plastic and rubber sheets for roof waterproofing
- BS EN 1931:2000 Flexible sheets for waterproofing. Bitumen, plastic, and rubber sheets for roof waterproofing. Determination of water vapour transmission properties (British Standard)
- EN 1296:2000 Flexible sheets for waterproofing - Bitumen, plastic and rubber sheets for roofing - Method of artificial ageing by long term exposure to elevated temperature
- EN 1548:2007 Flexible sheets for waterproofing - Plastic and rubber sheets for roof waterproofing - Method for exposure to bitumen
- BS EN 12730:2015 Flexible sheets for waterproofing. Bitumen, plastic and rubber sheets for roof waterproofing. Determination of resistance to static loading
- BS EN 12311-2:2013 Flexible sheets for waterproofing. Determination of tensile properties Plastic and rubber sheets for roof waterproofing
- BS EN 12311-2:2013 Flexible sheets for waterproofing. Determination of tensile properties Plastic and rubber sheets for roof waterproofing
- BS EN 13501-1:2018 Fire classification of construction products and building elements - Classification using data from reaction to fire tests
- ASTM D903-98. Standard Test Method for Peel or Stripping Strength of Adhesive Bonds.
- BS EN 1850-2:2001. Flexible sheets for waterproofing. Determination of visible defects - Plastic and rubber sheets for roof waterproofing.

BS EN 1848-2:2001. Flexible sheets for waterproofing. Determination of length, width and straightness - Plastic and rubber sheets for roof waterproofing