

Statement of Verification

BREG EN EPD No.: 000390

Issue 2

This is to verify that the

Environmental Product Declaration

provided by:

Hempel A/S

is in accordance with the requirements of:

EN 15804:2012+A2:2019

and

BRE Global Scheme Document SD207

This declaration is for:

1 kilogram of Hempadur Fast Dry 17410 paint



Company Address

HEMPEL A/S
Lundtoftegårdsvej 91
DK-2800 Kgs. Lyngby
Denmark



Signed for BRE Global Ltd

Emma Baker
Operator

05 October 2023
Date of this Issue

08 November 2021
Date of First Issue

07 November 2026
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit www.greenbooklive.com/terms.)

To check the validity of this statement of verification please, visit www.greenbooklive.com/check or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.

T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: Enquiries@breglobal.com



Environmental Product Declaration

EPD Number: 000390

General Information

| EPD Programme Operator | Applicable Product Category Rules |
|---|---|
| BRE Global Watford, Herts WD25 9XX United Kingdom | BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804+A2 PN 514 Rev 3.0 |
| Commissioner of LCA study | LCA consultant/Tool |
| HEMPEL A/S Lundtoftegårdsvej 91 DK-2800 Kgs. Lyngby Denmark | ITeC - The Catalonia Institute of Construction Technology Wellington 19 - ES08018 Barcelona - Tel 933 093 404 www.itec.cat SimaPro Version 9.1.1 by PRé Sustainability BV. |
| Declared/Functional Unit | Applicability/Coverage |
| 1 kilogram of Hempadur Fast Dry 17410 paint | Product Specific. |
| EPD Type | Background database |
| Cradle to Gate with Modules C and D | Ecoinvent v3.6 (2019) database. |
| Demonstration of Verification | |
| CEN standard EN 15804 serves as the core PCR ^a | |
| Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External | |
| (Where appropriate ^b)Third party verifier: Pat Hermon | |
| a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4) | |
| Comparability | |
| Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A2:2019. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A2:2019 for further guidance | |

Information modules covered

| Product | | | Construction | | Use stage | | | | | | | End-of-life | | | | Benefits and loads beyond the system boundary |
|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|-----------------------------|--------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|---|
| | | | | | Related to the building fabric | | | | | Related to the building | | | | | | |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Raw materials supply | Transport | Manufacturing | Transport to site | Construction – Installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction demolition | Transport | Waste processing | Disposal | Reuse, Recovery and/or Recycling potential |
| <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Note: Ticks indicate the Information Modules declared.

Manufacturing site(s)

The transport distances were adapted to both factories, specific transport distances for each provider were used for raw material transport. The manufacturing sites included in this EPD are:

Hempel Paints (Poland) Sp. z o.o
Ul. Modrzewiowa 2, 64-320 Buk,
Niepruszewo, Poland.

Hempel Paints (Emirates) L.L.C
Interchange No. 08, Sajja Area, Plot No 698/G Al
Dhaid Road, P.O.Box 2000,
Sharjah, United Arab Emirates

Construction Product:

Product Description

This EPD is representative for Hempadur Fast Dry 17410.

The product is a two-component, solvent-borne, epoxy paint, which combines high volume solids with a short drying time. It contains zinc phosphate for better corrosion protection. Hempadur Fast Dry 17410 is suitable for onshore corrosion protection of new-build steel constructions where fast to handle and short overcoating times are required, such as steel for factory buildings, stadiums, exhibition halls, airports, power plants, refineries, chemical and petrochemical plants.

Technical Information

| Property | Value, Unit |
|----------------------------|-------------------------------|
| Relative density | 1.6 kg/l |
| Solids by volume | 74 ± 3% |
| Dry film thickness | 70 – 125 µm |
| Wet film thickness | 90 – 170 µm |
| Theoretical spreading rate | 11 – 5.9 m ² /l |
| Coverage | 0.15 – 0.27 kg/m ² |

Product Contents

The material composition of the declared mixed product:

| Material/Chemical Input | % |
|-------------------------|---------|
| Filler | 25 – 50 |
| Binder | 25 – 50 |
| Pigments | < 10 |
| Solvents | < 20 |
| Additives | < 5 |

Manufacturing Process

The manufacturing process for coatings involves combining and mixing multiple chemicals and materials into a homogenous product, which is then packaged and distributed.

The manufacturing processes for each of the products are identical.

Process flow diagram



End of Life

Coatings are typically disposed of with the substrate they are painted on. This can be through recycling, incineration or landfill, but the coating itself is unlikely to be separated from the substrate during the disposal process.

Life Cycle Assessment Calculation Rules

Declared / Functional unit description

1 kilogram of Hempadur Fast Dry 17410 paint.

System boundary

The chosen system has been Cradle to Gate with Modules C and D, which means that the Life Cycle Assessment is contemplated from the manufacturing of the paints until they leave the factory, considering the end-of-life stage and the benefits and loads beyond the system boundary.

Data sources, quality and allocation

To carry out this study, 2020 (January 1, 2020 - December 31, 2020) has been considered as the reference year.

The background database is Ecoinvent v3.6 (2019) Database.

The quality of the data and the uncertainties associated with the inventories of each input are also analysed in accordance to Table E.1 of Annex E - Schemes to be applied for data quality assessment of generic and specific data of the EN 15804:2012+A2:2019 standard.

Cut-off criteria

For the present analysis, more than 99% of the mass and energy inputs and outputs of the system have been considered, leaving out diffuse emissions in the factory and the production of manufacturing infrastructure such as industrial machinery and equipment. On the other hand, those suppliers or manufacturers of raw materials that supply less than 5% of the total raw material consumption have been omitted. The remaining suppliers have been adjusted proportionally to 100% to balance this deficit.

LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

| Parameters describing environmental impacts | | | GWP-total | GWP-fossil | GWP-biogenic | GWP-luluc | ODP | AP | EP-freshwater |
|---|--------------------------------------|------|-----------------------|-----------------------|-----------------------|-----------------------|-------------|-----------------------|--|
| | | | kg CO ₂ eq | kg CO ₂ eq | kg CO ₂ eq | kg CO ₂ eq | kg CFC11 eq | mol H ⁺ eq | kg (PO ₄) ³⁻ eq |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG | AGG | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG | AGG | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG | AGG | AGG | AGG | AGG |
| | Total (of product stage) | A1-3 | 2.60E+00 | 2.56E+00 | 2.83E-02 | 5.73E-03 | 2.21E-07 | 1.07E-02 | 6.73E-04 |
| Construction process stage | Transport | A4 | MND | MND | MND | MND | MND | MND | MND |
| | Construction | A5 | MND | MND | MND | MND | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND | MND | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND | MND | MND | MND | MND |
| | Repair | B3 | MND | MND | MND | MND | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND | MND | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND | MND | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND | MND | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND | MND | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Transport | C2 | 4.05E-03 | 4.05E-03 | 1.66E-06 | 3.21E-08 | 9.40E-10 | 8.01E-06 | 2.03E-08 |
| | Waste processing | C3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Disposal | C4 | 1.14E-01 | 1.14E-01 | 9.84E-05 | 2.07E-06 | 9.55E-10 | 4.99E-05 | 6.55E-07 |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

GWP-total = Global warming potential, total;
 GWP-fossil = Global warming potential, fossil;
 GWP-biogenic = Global warming potential, biogenic;
 GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer;
 AP = Acidification potential, accumulated exceedance; and
 EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment

LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

| | | | Parameters describing environmental impacts | | | | | | |
|---|--------------------------------------|------|---|----------------|-------------|--------------------|-------------------------|----------------------------------|-------------------|
| | | | EP-marine | EP-terrestrial | POCP | ADP-mineral&metals | ADP-fossil | WDP | PM |
| | | | kg N eq | mol N eq | kg NMVOC eq | kg Sb eq | MJ, net calorific value | m ³ world eq deprived | disease incidence |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG | AGG | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG | AGG | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG | AGG | AGG | AGG | AGG |
| | Total (of product stage) | A1-3 | 2.13E-03 | 2.08E-02 | 1.01E-02 | 2.01E-05 | 4.78E+01 | 1.42E+00 | 1.02E-07 |
| Construction process stage | Transport | A4 | MND | MND | MND | MND | MND | MND | MND |
| | Construction | A5 | MND | MND | MND | MND | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND | MND | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND | MND | MND | MND | MND |
| | Repair | B3 | MND | MND | MND | MND | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND | MND | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND | MND | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND | MND | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND | MND | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Transport | C2 | 1.33E-06 | 1.48E-05 | 5.25E-06 | 2.39E-10 | 5.74E-02 | -1.26E-05 | 2.33E-10 |
| | Waste processing | C3 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Disposal | C4 | 2.06E-05 | 2.24E-04 | 8.73E-05 | 2.54E-09 | 7.17E-02 | 1.86E-04 | 1.23E-09 |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;
 EP-terrestrial = Eutrophication potential, accumulated exceedance;
 POCP = Formation potential of tropospheric ozone;
 ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer;
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption; and
 PM = Particulate matter.

LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

| Parameters describing environmental impacts | | | IRP | ETP-fw | HTP-c | HTP-nc | SQP |
|---|--------------------------------------|------|-------------------------|----------|----------|----------|---------------|
| | | | kBq U ²³⁵ eq | CTUe | CTUh | CTUh | dimensionless |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG | AGG | AGG |
| | Total (of product stage) | A1-3 | 1.60E-01 | 6.10E+01 | 4.49E-09 | 6.77E-08 | 1.12E+01 |
| Construction process stage | Transport | A4 | MND | MND | MND | MND | MND |
| | Construction | A5 | MND | MND | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND | MND | MND |
| | Repair | B3 | MND | MND | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 | 0 | 0 |
| | Transport | C2 | 2.58E-04 | 2.31E-02 | 3.01E-13 | 3.61E-11 | 1.43E-04 |
| | Waste processing | C3 | 0 | 0 | 0 | 0 | 0 |
| | Disposal | C4 | 4.29E-04 | 7.00E-02 | 7.16E-12 | 8.46E-11 | 1.75E-01 |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D | 0 | 0 | 0 | 0 | 0 |

IRP = Potential human exposure efficiency relative to U235;
 ETP-fw = Potential comparative toxic unit for ecosystems;
 HTP-c = Potential comparative toxic unit for humans;

HTP-nc = Potential comparative toxic unit for humans; and
 SQP = Potential soil quality index.

LCA Results (continued)

| Parameters describing resource use, primary energy | | | PERE | PERM | PERT | PENRE | PENRM | PENRT |
|---|--------------------------------------|------|----------|----------|----------|----------|----------|----------|
| | | | MJ | MJ | MJ | MJ | MJ | MJ |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG | AGG | AGG | AGG |
| | Total (of product stage) | A1-3 | 2.79E+00 | 9.00E-01 | 3.69E+00 | 5.13E+01 | 5.25E-01 | 5.18E+01 |
| Construction process stage | Transport | A4 | MND | MND | MND | MND | MND | MND |
| | Construction | A5 | MND | MND | MND | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND | MND | MND | MND |
| | Repair | B3 | MND | MND | MND | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Transport | C2 | 8.03E-05 | 0 | 8.03E-05 | 6.10E-02 | 0 | 6.10E-02 |
| | Waste processing | C3 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Disposal | C4 | 1.81E-03 | 0 | 1.81E-03 | 7.61E-02 | 0 | 7.61E-02 |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D | 0 | 0 | 0 | 0 | 0 | 0 |

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;
 PERM = Use of renewable primary energy resources used as raw materials;
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;
 PENRM = Use of non-renewable primary energy resources used as raw materials;
 PENRT = Total use of non-renewable primary energy resource

LCA Results (continued)

| Parameters describing resource use, secondary materials and fuels, use of water | | | | | | |
|---|--------------------------------------|------|-----|---------------------------|---------------------------|----------------|
| | | | SM | RSF | NRSF | FW |
| | | | kg | MJ net calorific value | MJ net calorific value | m ³ |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG | AGG |
| | Total (of product stage) | A1-3 | 0 | 0 | 0 | 3.97E-02 |
| Construction process stage | Transport | A4 | MND | MND | MND | MND |
| | Construction | A5 | MND | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND | MND |
| | Repair | B3 | MND | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 | 0 |
| | Transport | C2 | 0 | 0 | 0 | 8.60E-08 |
| | Waste processing | C3 | 0 | 0 | 0 | 0 |
| | Disposal | C4 | 0 | 0 | 0 | 9.36E-06 |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D | 0 | 0 | 0 | 0 |

SM = Use of secondary material;
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;
FW = Net use of fresh water

LCA Results (continued)

| Other environmental information describing waste categories | | | | | |
|---|--------------------------------------|------|----------|----------|----------|
| | | | HWD | NHWD | RWD |
| | | | kg | kg | kg |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG |
| | Total (of product stage) | A1-3 | 2.58E-02 | 3.37E-01 | 7.34E-05 |
| Construction process stage | Transport | A4 | MND | MND | MND |
| | Construction | A5 | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND |
| | Repair | B3 | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 |
| | Transport | C2 | 1.52E-07 | 3.06E-06 | 4.16E-07 |
| | Waste processing | C3 | 0 | 0 | 0 |
| | Disposal | C4 | 1.51E-07 | 1.00E+00 | 4.52E-07 |
| Potential benefits and loads beyond the system boundaries | Reuse, recovery, recycling potential | D | 0 | 0 | 0 |

HWD = Hazardous waste disposed;
 NHWD = Non-hazardous waste disposed;
 RWD = Radioactive waste disposed

LCA Results (continued)

| | | | Other environmental information describing output flows – at end of life | | | | | |
|--|--------------------------------------|-------|--|----------|-----|-----------------------|---------------------------|-----------------------------|
| | | | CRU | MFR | MER | EE | Biogenic carbon (product) | Biogenic carbon (packaging) |
| | | | kg | kg | kg | MJ per energy carrier | kg C | kg C |
| Product stage | Raw material supply | A1 | AGG | AGG | AGG | AGG | AGG | AGG |
| | Transport | A2 | AGG | AGG | AGG | AGG | AGG | AGG |
| | Manufacturing | A3 | AGG | AGG | AGG | AGG | AGG | AGG |
| | Total (of product stage) | A1 -3 | 0 | 7.03E-02 | 0 | 0 | 0 | 0 |
| Construction process stage | Transport | A4 | MND | MND | MND | MND | MND | MND |
| | Construction | A5 | MND | MND | MND | MND | MND | MND |
| Use stage | Use | B1 | MND | MND | MND | MND | MND | MND |
| | Maintenance | B2 | MND | MND | MND | MND | MND | MND |
| | Repair | B3 | MND | MND | MND | MND | MND | MND |
| | Replacement | B4 | MND | MND | MND | MND | MND | MND |
| | Refurbishment | B5 | MND | MND | MND | MND | MND | MND |
| | Operational energy use | B6 | MND | MND | MND | MND | MND | MND |
| | Operational water use | B7 | MND | MND | MND | MND | MND | MND |
| End of life | Deconstruction, demolition | C1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Transport | C2 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Waste processing | C3 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Disposal | C4 | 0 | 0 | 0 | 0 | 0 | 0 |
| Potential benefits and loads beyond the system | Reuse, recovery, recycling potential | D | 0 | 0 | 0 | 0 | 0 | 0 |

CRU = Components for reuse;
MFR = Materials for recycling

MER = Materials for energy recovery;
EE = Exported Energy

Scenarios and additional technical information

| Scenarios and additional technical information | | | |
|--|--|-------|----------|
| Scenario | Parameter | Units | Results |
| A4 – Transport to the building site | Module not declared | | |
| A5 – Installation in the building | Module not declared | | |
| B2 – Maintenance | Module not declared | | |
| B3 – Repair | Module not declared | | |
| B4 – Replacement | Module not declared | | |
| B5 – Refurbishment | Module not declared | | |
| Reference service life | Module not declared | | |
| B6 – Use of energy; B7 – Use of water | Module not declared | | |
| C1 to C4 End of life, | Waste for final disposal: Landfill | % | 100 |
| | Transport to waste processing: Truck, fuel consumption | kgkm | 3.66E-05 |
| | Transport to waste processing: Distance | km | 30 |
| | Transport to waste processing: Capacity utilisation | % | 85 |
| Module D | Module declared | | |

Interpretation

The results displayed in Figure 1 apply to 1 kilogram of Hempadur Fast Dry 17410 paint. It illustrates the relative contributions of the different modules assessed to various environmental impact categories and to primary energy use. Most impacts relate to the raw materials that compose the paint (included in Module A1-A3).

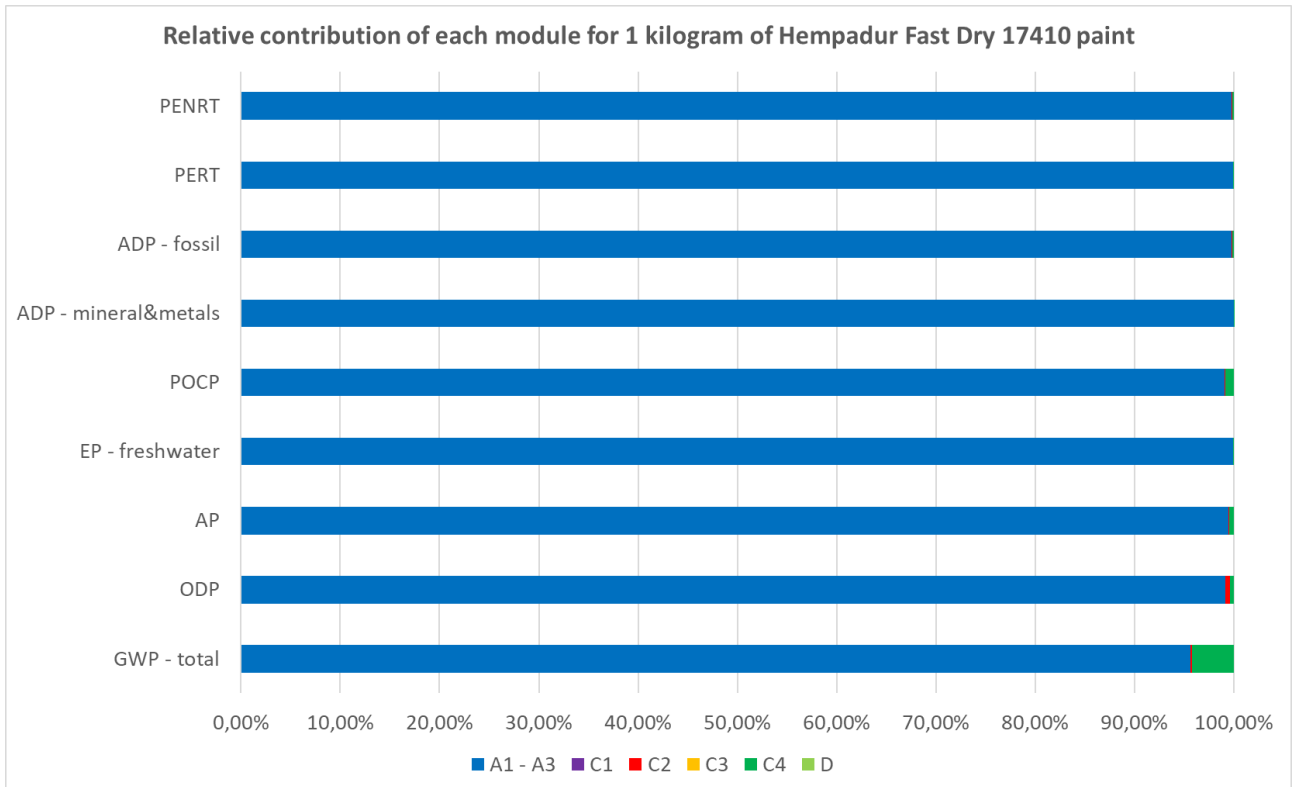


Figure 1: Relative contribution of each module for 1 kilogram of Hempadur Fast Dry 17410 paint.

Raw material manufacturing and transport (66%), production (3%) and packaging (31%) account for the total of the use of renewable primary energy resources (PERT). The manufacturing of raw materials and its transport (93%) has the greatest impact on the use of non-renewable primary energy resources (PENRT), while the impact of the production process (due to fuel consumption and product packaging) measures 7%.

The pre-product manufacturing (raw materials and its distribution) is the main contributor in all impact categories for Module A1-A3 with at least 77% in each case.

In this EPD Hempadur Fast Dry 17410 product from Poland and United Arab Emirates manufacturing sites are studied. Depending on the manufacturing site, the raw materials transport varies and thus the environmental impacts and primary energy use (Figure 2 displays the variation for Global Warming Potential (GWP) for declared unit).

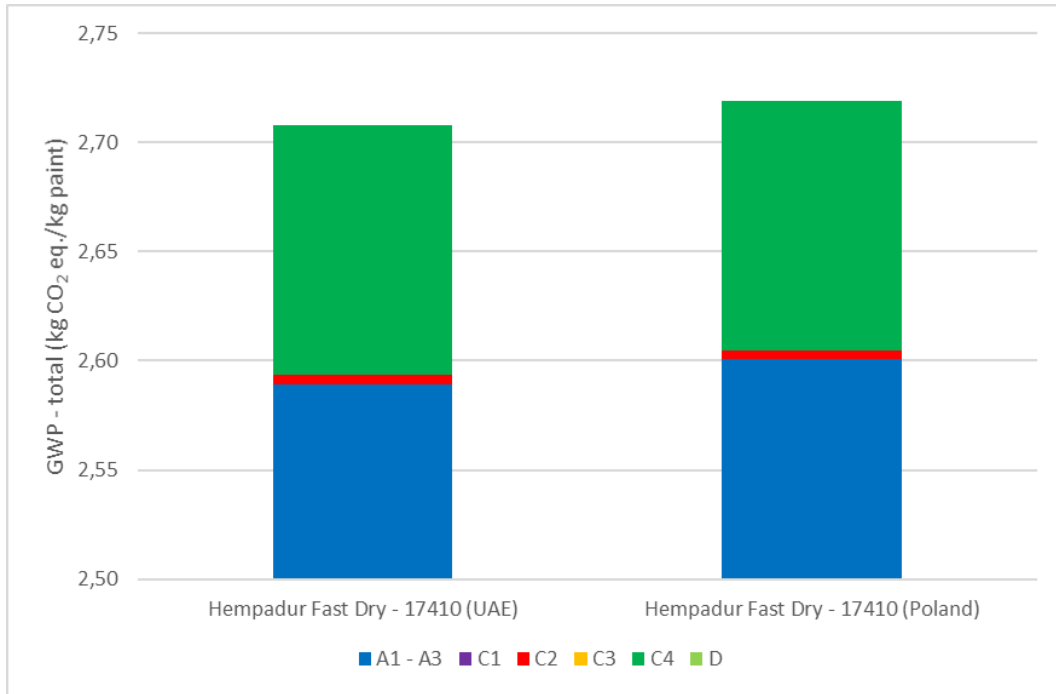


Figure 2: Variation of Global Warming Potential (GWP – total) of each product within the declared unit, 1 kilogram of Hempadur Fast Dry 17410 paint.

References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A1:2013. London, BSI, 2013.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.