## **Statement of Verification**

BREG EN EPD No.: 000570

Issue 01

This is to verify that the

## **Environmental Product Declaration** provided by:

Philip Grahame International Ltd

is in accordance with the requirements of:

EN 15804:2012+A2:2019

and BRE Global Scheme Document SD207

## This declaration is for: **1 kg of Standard Cable Trunking with turnbuckle fasteners**

## **Company Address**

Montrose Road Dukes Park Industrial Estate Chelmsford Essex, CM2 6TE United Kingdom



BRE/Global

EPD

TIP



Member of 🕗 NIEDAX GROUP

Emma Baker 27 February 2024 Date of this Issue Signed for BRE Global Ltd Operator 27 February 2024 26 February 2029 Date of First Issue Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit <u>www.greenbooklive.com/terms</u>. To check the validity of this statement of verification please, visit <u>www.greenbooklive.com/check</u> or contact us. BRE Global Ltd., Garston, Watford WD25 9XX. T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: <u>Enquiries@breglobal.com</u>



BF1805-C-ECOP Rev 0.3

Page 1 of 19

© BRE Global Ltd, 2024

## **Environmental Product Declaration**

## EPD Number: 000570

## **General Information**

EPD Programme Operator	Applicable Product Category Rules					
BRE Global Watford, Herts WD25 9NH United Kingdom	BRE 2021 Product Category Rules (PN 514 Rev 3.1) for Type III environmental product declaration of construction products to EN 15804:2012 + A2:2019.					
Commissioner of LCA study	LCA consultant/Tool					
Philip Grahame Ltd Montrose Road, Dukes Park Ind Est, Chelmsford, Essex, CM2 6TE	Chi Zhang / BRE LINA v2.0					
Functional Unit	Applicability/Coverage					
1 kg of Standard Cable Trunking with turnbuckle fasteners for the support and accommodation of cables, electrical equipment, and communication system of cables over 30 years.	Product Specific.					
EPD Type Background database						
СПОТуре	Background database					
Cradle to Grave	Ecoinvent 3.8					
Cradle to Grave						
Cradle to Grave	Ecoinvent 3.8					
Cradle to Grave Demonstra CEN standard EN 18	Ecoinvent 3.8					
Cradle to Grave Demonstra CEN standard EN 1 Independent verification of the declara Undependent verification of the declara (Where appropriate)	Ecoinvent 3.8 ation of Verification 5804 serves as the core PCR <sup>a</sup> ation and data according to EN ISO 14025:2010					
Cradle to Grave Demonstra CEN standard EN 14 Independent verification of the declara Internal (Where appropriate Bala a: Product category rules	Ecoinvent 3.8 Ation of Verification 5804 serves as the core PCR <sup>a</sup> ation and data according to EN ISO 14025:2010 External riate <sup>b</sup> ) Third party verifier:					
Cradle to Grave Demonstra CEN standard EN 18 CEN standard EN 18 Independent verification of the declara Internal (Where appropriate Bala a: Product category rules b: Optional for business-to-business communication; mandatory	Ecoinvent 3.8 ation of Verification 5804 serves as the core PCR <sup>a</sup> ation and data according to EN ISO 14025:2010 External riate <sup>b</sup> ) Third party verifier: a Subramanian					
Cradle to Grave	Ecoinvent 3.8 ation of Verification 5804 serves as the core PCR a ation and data according to EN ISO 14025:2010 External riate <sup>b</sup> ) Third party verifier: a Subramanian r for business-to-consumer communication (see EN ISO 14025:2010, 9.4)					

#### Information modules covered

	Produc	t	Const	ruction	Rel	ated to		Use sta Iding fa		Relat the bເ			End-	of-life		Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
$\checkmark$	V	V	V	V	$\checkmark$	V	V	V	V	V	V	V	$\checkmark$	V	V	V

Note: Ticks indicate the Information Modules declared.

#### **Manufacturing site**

Montrose Road, Dukes Park Ind Est, Chelmsford, Essex, CM2 6TE

## **Construction Product:**

#### **Product Description**

In the wiring infrastructure of commercial and industrial buildings, cable trunking systems, constructed from 100% galvanized steel, serve to organize and safeguard power and communication cables. These systems offer a blend of mechanical and electrical protection for the cables, which are typically single-insulated and therefore more vulnerable than their armored counterparts.

Cable Trunking is used in the distribution of power and communication cables within commercial and industrial installations. Cable Trunking is designed to act as an enclosure and offer protection, both mechanically and electrically to the installed cables as they are often only single-insulated cables.

Cable trunking systems come in all shapes, and forms, such as 50x50, 75x50, 75x75, 100x42, etc. with turnbuckle fasteners used to secure the lid. The LCA analysis is conducted for 1 kg of standard Cable Trunking using the overall production data. Therefore, the end-user of this EPD can enable the impacts for the specific product used in the construction sector. Product tables show as follows:

Product Code	Trunking Size (mm)	Body Thickness	Lid Thickness	Trunking Body Coil Width	Trunking Lid Coil Width	Combined body & lid coil width	Product weight (kg)
TL3/22/G	50x50	0.8	0.8	170	73	243	4.5739
TL3/32/G	75x50	0.9	0.9	195	98	293	6.2021
TL3/33/G	75x75	0.9	0.9	245	98	343	7.2619
TL3/42/G	100x42	0.9	0.9	220	123	343	7.2619
TL3/43/G	100x75	0.9	0.9	270	123	393	8.3216
TL3/44/G	100x100	0.9	0.9	320	123	443	9.3814
TL3/62/G	150x50	0.9	1.15	270	173	N/A	10.3982
TL3/63/G	150x75	0.9	1.15	320	173	N/A	11.4579
TL3/64/G	150x100	0.9	1.15	370	173	N/A	12.5177
TL3/66/G	150x150	1.15	1.15	470	173	643	17.4038

### **Technical Information**

Property	Value, Unit
Philip Grahame Cable Trunking is manufactured to the product standard BS EN 50085	Conforms



### **Main Product Contents**

Material/Chemical Input	%
Pre-Galvanised sheet steel	100
Standard Length (m)	3
Standard finish	Hot-Dip Pre-Galvanised to BS EN 10346
Special finish	Epoxy Powder Coated Black/White

### **Manufacturing Process**

Philip Grahame Cable Trunking is manufactured from pre-galvanised steel to BS EN 10346. Pre-galvanized steel is produced by unwinding steel coil and passing it continuously through a bath of molten zinc and then past air jets to remove excess zinc from the surface. The process is closely controlled to produce a thin, even and ripple free zinc coating with very few imperfections.


Philip Grahame purchases all steel for the manufacture of Cable Trunking from Tata Steel UK. To reduce scrap steel is purchased in coil form from Tata with the width of the coil cut precisely to the product width.

Tata manufactures the wide coil in South Wales and then transports large wide coil by rail to their Steelpark Headquarters in the Midlands, here it is processed into the customer's required widths.

All manufacture is carried out at Philip Grahame's manufacturing facility in Chelmsford, Essex. The complete manufacturing facility is controlled by Philip Grahame's BS EN ISO 9001 Quality management system along with the BS EN ISO 14001 Environmental management System. To manufacture the flat blank for a Cable Trunking body and lid the coils are loaded onto a bespoke press line. The coil is unwound and flattened and then passed through a power press where the holes are punched into the steel. The coil is fed through a guillotine where it is cut to length and then conveyed to a stacking station where pallets of product are stacked.



#### **Process flow diagram**

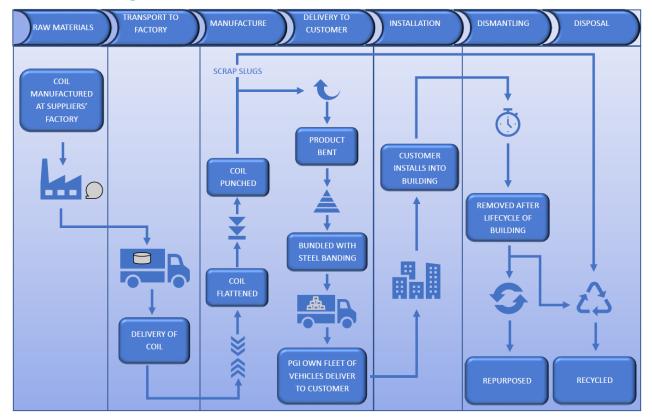

#### **Construction Installation**

For the installation of the product, only standard tools are required.

#### **Use Information**

Given the disparity in life expectancy between the LCA study period (60 years) and the cable trunking life service year (30 years), there will inevitably be a need for replacement halfway through the building's lifespan. When the cable trunking reaches the end of its service life or becomes unsuitable for its intended use, a complete replacement is required. Its modular design facilitates straightforward disassembly and replacement, ensuring minimal energy and ancillary consumption. Also, during the replacement, there is 0% reused with 95% being recycled which is based on commercial recycling rates.

#### **End of Life**

Cable trunking installations are essentially a kit of parts that could easily be dismantled and reused. This theoretically means that parts of Cable trunking installations could be continually reused and never recycled or sent to landfill. However, there is an issue with warranty, workmanship and product use that prevents this from happening. As there is no control of initial loading, installation practices and decommissioning there is no ability to understand if the SWL of the product has been compromised. For this reason, there is currently no reuse of this product being practiced.

## Life Cycle Assessment Calculation Rules

### **Functional unit description**

1 kg of Standard Cable Trunking with turnbuckle fasteners for the support and accommodation of cables, electrical equipment, and communication system of cables over 30 years.

### System boundary

This is a cradle-to-grave LCA, reporting all the life cycle modules A1 to C4 and module D, in accordance with EN 15804:2012+A2:2019. It's important to note that the LCA analysis utilizes electricity data from the GB National Grid, a detail that is integral to the system boundary of this assessment. This inclusion ensures that the environmental impacts associated with the use of electricity are accurately represented throughout the life cycle stages. As per the latest data, the emissions factor for electricity generated from the UK grid is 0.20707 kg CO2e/kWh.

### Data sources, quality, and allocation

Specific primary data derived from Philip Grahame's production process in the Chelmsford, Essex factory, have been modelled using the LINA A2 LCA and the ecoinvent 3.8 database. In accordance with the requirements of EN15804:2012 + A2:2019, the most current available data has been used. The manufacturer-specific data from Philip covers a period of one year (01/01/2021 – 31/12/2021). Secondary data has been obtained for all other upstream and downstream processes that are beyond the control of the manufacturer (i.e., raw material production) from the ecoinvent 3.8 database. All ecoinvent datasets are complete within the context used and conform to the system boundary and the criteria for the exclusion of inputs and outputs, according to the requirements specified in EN15804:2012+A2:2019.

Philip Grahame's cable trunking is not the only product manufactured at the Chelmsford, Essex factory other products are manufactured along with the cable ladder, so the allocation of energy, water, and waste is required, and this has been done by using the Mass allocation in the provisions of the BRE PCR PN514 and EN 15804:2012+A2:2019. Site wide values for energy, water and wastewater have been taken from bills. Figures for the raw materials, ancillary materials and packaging were from actual usages. This LCA covers the manufacturing of Philip Grahame's cable trunking is designed to act as an enclosure and offer protection, both mechanically and electrically to the installed cables as they are often only single insulated cables. Which cover 11.4% of the factory production.

Quality Level	Geographical representativeness	Technical representativeness	Time representativeness
Very Good	Data from area under study	Data from processes and products under study. Same state of technology applied as defined in goal and scope (i.e. identical technology).	There is less than 5 years between the ecoinvent LCI reference year, and the time period for which the LCA was undertaken.

Specific UK datasets have been selected from the ecoinvent LCI for this LCA. The quality level of geographical and technical representativeness is therefore Very Good. The quality level of time representativeness is Very Good as the background LCI datasets are based on ecoinvent v3.8 which was compiled in 2021. It's important to note that the LCA analysis utilizes electricity data from the GB National Grid, a detail that is integral to the system boundary of this assessment. This inclusion ensures that the environmental impacts associated with the use of electricity are accurately represented throughout the life cycle stages. As per the latest data, the emissions factor for electricity generated from the UK grid is 0.239 kgCO2e/kWh. The intended purpose of this LCA is for the data and results to be used in a published third-

EPD Number: 000570 BF1805-C-ECOP Rev 0.3

party verified EPD Therefore, there is less than 5 years between the ecoinvent LCI reference year and the time period for which the LCA was undertaken.

#### **Cut-off criteria**

All raw materials and energy input to the manufacturing process have been included, except for direct emissions to air, water and soil, which are not measured. The inventory process in this LCA includes all data related to raw materials and packaging materials. There are no ancillary or consumable materials used and so none have been included. Process energy, water use and discharge and process and general waste are included.

# hre

### **LCA Results**

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts											
			GWP-total	GWP- fossil	GWP- biogenic	GWP- luluc	ODP	AP	EP- freshwate r		
			kg CO <sub>2</sub> eq	kg CO₂ eq	kg CO₂ eq	kg CO <sub>2</sub> eq	kg CFC11 eq	mol H⁺ eq	kg (PO <sub>4</sub> ) <sup>3-</sup> eq		
	Raw material supply	A1	3.00E+00	2.99E+00	1.19E-02	2.84E-03	1.70E-07	3.93E-02	1.45E-03		
	Transport	A2	2.41E-02	2.41E-02	2.24E-05	9.81E-06	5.66E-09	1.37E-04	1.63E-06		
Product stage	Manufacturing	A3	7.52E-02	7.34E-02	1.67E-03	5.35E-05	1.04E-08	4.98E-04	7.13E-06		
	Total (of product stage)	A1-3	3.10E+00	3.08E+00	1.35E-02	2.90E-03	1.86E-07	3.99E-02	1.46E-03		
Construction	Transport	A4	5.26E-03	5.25E-03	4.87E-06	2.14E-06	1.23E-09	2.98E-05	3.54E-07		
process stage	Construction	A5	9.30E-02	9.25E-02	4.06E-04	8.70E-05	5.57E-09	1.20E-03	4.38E-05		
	Use	B1	0.00E+00	0.00E+00	0.00E+0	0.00E+00	0.00E+00	0.00E+00	0.00E+00		
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+0	0.00E+00	0.00E+00	0.00E+00	0.00E+00		
	Repair	B3	0.00E+00	0.00E+00	0.00E+0	0.00E+00	0.00E+00	0.00E+00	0.00E+00		
Use stage	Replacement	B4	3.20E+00	3.18E+00	1.40E-02	2.99E-03	1.92E-07	4.11E-02	1.51E-03		
	Refurbishmen t	B5	3.20E+00	3.18E+00	1.40E-02	2.99E-03	1.92E-07	4.11E-02	1.51E-03		
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+00		
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+00		
	Deconstructio n, demolition	C1	0.00E+00	0.00E+00	0.00E+0 0	0.00E+00	0.00E+00	0.00E+00	0.00E+00		
End of life	Transport	C2	8.32E-03	8.31E-03	7.08E-06	3.26E-06	1.92E-09	3.37E-05	5.35E-07		
End of life	Waste processing	C3	5.47E-02	5.47E-02	1.93E-05	5.46E-06	1.17E-08	5.68E-04	1.69E-06		
	Disposal	C4	2.64E-04	2.63E-04	2.61E-07	2.49E-07	1.07E-10	2.48E-06	2.41E-08		
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.41E+00	-1.42E+0	3.23E-03	-8.94E-04	-6.44E-08	-5.44E-03	-6.25E-04		

GWP-total = Global warming potential, total;

GWP-fossil = Global warming potential, total, GWP-biogenic = Global warming potential, biogenic; GWP-luluc = Global warming potential, land use and land use change;

ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, accumulated exceedance; and EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment

### LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts										
			EP- marine	EP- terrestrial	POCP	ADP- mineral &metals	ADP- fossil	WDP	PM	
			kg N eq	mol N eq	kg NMVOC eq	kg Sb eq	MJ, net calorific value	m <sup>3</sup> world eq deprived	disease incidence	
	Raw material supply	A1	4.04E-03	1.45E-01	1.34E-02	1.13E-04	3.33E+01	1.48E+00	4.84E-07	
Product stage	Transport	A2	4.95E-05	5.41E-04	1.55E-04	8.08E-08	3.71E-01	1.79E-03	2.67E-09	
Product stage	Manufacturing	A3	2.03E-04	2.16E-03	5.86E-04	1.22E-07	1.47E+00	8.95E-03	1.09E-08	
	Total (of product stage)	A1-3	4.29E-03	1.47E-01	1.41E-02	1.13E-04	3.51E+01	1.49E+00	4.97E-07	
Construction	Transport	A4	1.08E-05	1.18E-04	3.37E-05	1.76E-08	8.08E-02	3.90E-04	5.81E-10	
process stage	Construction	A5	1.29E-04	4.42E-03	4.24E-04	3.40E-06	1.05E+00	4.48E-02	1.49E-08	
	Use	B1	0.00E+0	0.00E+00	0.00E+0	0.00E+0	0.00E+00	0.00E+00	0.00E+00	
	Maintenance	B2	0.00E+0	0.00E+00	0.00E+0	0.00E+0	0.00E+00	0.00E+00	0.00e+0	
	Repair	B3	0.00E+0	0.00E+00	0.00E+0	0.00E+0	0.00E+00	0.00E+00	0.00e+0	
Use stage	Replacement	B4	4.43E-03	1.52E-01	1.46E-02	1.17E-04	3.62E+01	1.54E+00	5.13E-07	
	Refurbishment	B5	4.43E-03	1.52E-01	1.46E-02	1.17E-04	3.62E+01	1.54E+00	5.13E-07	
	Operational energy use	B6	0.00E+0	0.00E+00	0.00E+0	0.00E+0	0.00E+00	0.00E+00	0.00E+00	
	Operational water use	B7	0.00E+0	0.00E+00	0.00E+0	0.00E+0	0.00E+00	0.00E+00	0.00E+00	
	Deconstruction, demolition	C1	0.00E+0	0.00E+00	0.00E+0	0.00E+0	0.00E+00	0.00E+00	0.00E+00	
	Transport	C2	1.02E-05	1.11E-04	3.40E-05	2.89E-08	1.26E-01	5.65E-04	7.17E-10	
End of life	Waste processing	C3	2.52E-04	2.76E-03	7.58E-04	2.81E-08	7.50E-01	1.73E-03	1.52E-08	
	Disposal	C4	8.61E-07	9.42E-06	2.74E-06	6.01E-10	7.35E-03	3.37E-04	4.99E-11	
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-1.30E- 03	-1.37E-02	-6.72E- 03	-1.93E- 06	- 1.37E+01	-3.39E-01	-1.08E-07	

EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;

EP-terrestrial = Eutrophication potential, accumulated exceedance;

POCP = Formation potential of tropospheric ozone;

ADP-mineral&metals = Abiotic depletion potential for non-fossil resources;

ADP-fossil = Depletion potential of the stratospheric ozone layer; WDP = Water (user) deprivation potential, deprivation-weighted water consumption; and PM = Particulate matter.

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts

			IRP	ETP-fw	HTP-c	HTP-nc	SQP
							OQ
			kBq U <sup>235</sup> eq	CTUe	CTUh	CTUh	dimensionless
	Raw material supply	A1	1.75E-01	1.19E+02	2.16E-08	1.16E-07	1.08E+01
	Transport	A2	1.91E-03	2.94E-01	1.17E-11	3.38E-10	3.17E-01
Product stage	Manufacturing	A3	3.63E-02	8.06E-01	2.13E-11	4.92E-10	4.27E-01
	Total (of product stage)	A1- 3	2.13E-01	1.20E+02	2.16E-08	1.17E-07	1.15E+01
Construction process stage	Transport	A4	4.17E-04	6.40E-02	2.55E-12	7.37E-11	6.89E-02
	Construction	A5	6.39E-03	3.61E+00	6.49E-10	3.52E-09	3.45E-01
	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Repair	B3	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Lles steve	Replacement	B4	2.20E-01	1.24E+02	2.23E-08	1.21E-07	1.19E+01
Use stage	Refurbishment	B5	2.20E-01	1.24E+02	2.23E-08	1.21E-07	1.19E+01
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	6.46E-04	9.81E-02	3.18E-12	1.03E-10	8.63E-02
End of life	Waste processing	C3	3.38E-03	4.39E-01	1.70E-11	3.18E-10	9.55E-02
	Disposal	C4	3.27E-05	4.64E-03	1.18E-13	3.05E-12	1.54E-02
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-3.49E-02	-3.96E+01	-8.29E-09	-2.94E-08	-3.80E+00

IRP = Potential human exposure efficiency relative to U235; ETP-fw = Potential comparative toxic unit for ecosystems; HTP-c = Potential comparative toxic unit for humans; HTP-nc = Potential comparative toxic unit for humans; and SQP = Potential soil quality index.

# hre

#### LCA Results (continued)

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use, primary energy

			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
	Raw material supply	A1	2.93E+00	0.00E+00	2.93E+00	3.29E+01	0.00E+00	3.29E+01
Product stage	Transport	A2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
F Toutiet stage	Manufacturing	A3	1.66E-01	1.32E-02	1.79E-01	1.45E+00	8.78E-03	1.46E+00
	Total (of product stage)	A1-3	3.10E+00	1.32E-02	3.11E+00	3.43E+01	8.78E-03	3.44E+01
Construction	Transport	A4	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
process stage	Construction	A5	9.29E-02	3.96E-04	9.33E-02	1.03E+00	2.63E-04	1.03E+00
	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use stage	Replacement	B4	3.19E+00	1.36E-02	3.20E+00	3.54E+01	9.04E-03	3.54E+01
	Refurbishment	B5	3.19E+00	1.36E-02	3.20E+00	3.54E+01	9.04E-03	3.54E+01
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	1.77E-03	0.00E+00	1.77E-03	1.23E-01	0.00E+00	1.23E-01
End of life	Waste processing	C3	4.20E-03	0.00E+00	4.20E-03	7.36E-01	0.00E+00	7.36E-01
	Disposal	C4	6.27E-05	0.00E+00	6.27E-05	7.22E-03	0.00E+00	7.22E-03
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-4.35E-01	0.00E+00	-4.35E-01	-1.36E+01	0.00E+00	-1.36E+01

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials; PERM = Use of renewable primary energy resources used as raw

materials;

PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding nonrenewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials;

PENRT = Total use of non-renewable primary energy resource

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing resource use, secondary materials and fuels, use of water

			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m <sup>3</sup>
	Raw material supply	A1	0.00E+00	0.00E+00	0.00E+00	3.66E-02
Product stage	Transport	A2	0.00E+00	0.00E+00	0.00E+00	4.43E-05
Floudet stage	Manufacturing	A3	2.63E-04	0.00E+00	0.00E+00	2.25E-04
	Total (of product stage)	A1- 3	2.63E-04	0.00E+00	0.00E+00	3.69E-02
Construction	Transport	A4	0.00E+00	0.00E+00	0.00E+00	9.64E-06
process stage	Construction	A5	7.88E-06	0.00E+00	0.00E+00	1.11E-03
	Use	B1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use stage	Replacement	B4	2.71E-04	0.00E+00	0.00E+00	3.80E-02
	Refurbishment	B5	2.71E-04	0.00E+00	0.00E+00	3.80E-02
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	Transport	C2	0.00E+00	0.00E+00	0.00E+00	1.40E-05
End of life	Waste processing	C3	2.88E-04	0.00E+00	0.00E+00	4.28E-05
	Disposal	C4	1.52E-06	0.00E+00	0.00E+00	7.88E-06
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0.00E+00	0.00E+00	0.00E+00	-8.12E-03

SM = Use of secondary material; RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing waste categories

			HWD	NHWD	RWD
			kg	kg	kg
	Raw material supply	A1	1.06E+00	5.33E+00	7.61E-05
Product stage	Transport	A2	0.00E+00	0.00E+00	0.00E+00
F TOUUCI Slage	Manufacturing	A3	2.69E-03	3.45E-02	1.20E-05
	Total (of product stage)	A1- 3	1.06E+00	5.36E+00	8.81E-05
Construction	Transport	A4	0.00E+00	0.00E+00	0.00E+00
process stage	Construction	A5	3.19E-02	1.61E-01	2.64E-06
	Use	B1	0.00E+00	0.00E+00	0.00E+00
	Maintenance	B2	0.00E+00	0.00E+00	0.00E+00
	Repair	B3	0.00E+00	0.00E+00	0.00E+00
Use stage	Replacement	B4	1.10E+00	5.52E+00	9.08E-05
	Refurbishment	B5	1.10E+00	5.52E+00	9.08E-05
	Operational energy use	B6	0.00E+00	0.00E+00	0.00E+00
	Operational water use	B7	0.00E+00	0.00E+00	0.00E+00
	Deconstruction, demolition	C1	0.00E+00	0.00E+00	0.00E+00
End of life	Transport	C2	1.39E-04	2.46E-03	8.50E-07
End of life	Waste processing	C3	9.88E-04	6.92E-03	5.18E-06
	Disposal	C4	7.65E-06	1.08E-04	4.82E-08
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-2.63E-01	-2.25E+00	-2.21E-05

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Other environmental information describing output flows - at end of life

		CRU	MFR	MER	EE	Biogenic carbon (product)	Biogenic carbon (packaging)	
			kg	kg	kg	kg MJ per kg energy carrier		kg C
	Raw material supply	A1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Transport	A2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Product stage	Manufacturing	A3	0.00e+0	2.09e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Total (of product stage)	A1- 3	0.00e+0	2.09e-1	0.00e+0	0.00e+0 0.00e+0		0.00e+0
Construction	Transport	A4	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
process stage	Construction	A5	0.00e+0	6.26e-3	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Use	B1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Maintenance	B2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Repair	B3	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Use stage	Replacement	B4	0.00e+0	2.15e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Refurbishment	B5	0.00e+0	2.15e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Operational energy use	B6	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Operational water use	B7	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Deconstruction, demolition	C1	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
End of life	Transport	C2	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Waste processing	C3	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0
	Disposal	C4	0.00e+0	9.50e-1	0.00e+0	0.00e+0	0.00e+0	0.00e+0
Potential benefits and loads beyond	Reuse, recovery, recycling	D	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0	0.00e+0

CRU = Components for reuse; MFR = Materials for recycling MER = Materials for energy recovery; EE = Exported Energy

## Scenarios and additional technical information

Scenario	Parameter	Units	Results					
	Throughout 2021 Philip Grahame delivered 13384 customer orders by their own fleet of vehicles. The total distance travelled by all vehicles was 546391km. So 40km is the average distance.							
	Diesel/ 16-32 t lorry	t/km	0.3					
A4 – Transport to the ouilding site	Distance:	km	40					
	Capacity utilization (incl. empty returns)	%	26					
	Weight of transported products		kg / unit	1.0				
A5 – Installation in the building	Installation waste is minimal as Philip Grahame have no minimum order quantities and offer a return scheme based on resaleable condition for stock items. Site installations may require cutting and a small amount of site fabrication work to ensure the installation fits the building requirements. Based on this, estimate a maximum of 3% wastage.							
	Installation waste percentage	3%						
Installation waste	Product waste: Steel waste to recycling	kg		0.03				
B1 – Use	The steel cable trunking is utilized in electrical infrastructure for supporting armored cables, facilitating power distribution in buildings.							
B2 – Maintenance	Regular inspections ensure the ladder remains free from corrosion and physical damage, requiring minimal maintenance due to its durable steel construction.							
B3 – Repair	In case of damage, sections of the ladder can be repaired or replaced as needed, with the steel material allowing for welding or bolting of new sections.							
B4 – Replacement	Given the disparity in life expectancy between the LCA study period (60 years) and the cable trunking life service years (30 years), there will inevitably be a need for replacement halfway through the building's lifespan. When the cable trunking reaches the end of its service life or becomes unsuitable for its intended use, a complete replacement is required. Its modular design facilitates straightforward disassembly and replacement, ensuring minimal energy an ancillary consumption.							
	Number of described replacement cycles per study period:			1				
B5 – Refurbishment	While the cable trunking is designed for a 30-year service life, opportunities for refurbishmen may arise to address wear and tear or to update parts of the system. However, due to the significant difference in the lifespan of the ladder compared to the building, refurbishment options are limited and focused on short-term solutions. Ultimately, a full replacement will be necessary to align with the building's longer service life, ensuring the continued safety and efficiency of the cable management system.							
	Number of described refurbishment cycles per study period:			1				
B6 – Operational	This module does not directly apply to the passive nature of the steel cable ladder, as it does not consume energy during operation.							
B7 – Operational water use	Similar to energy use, the steel cable trunking does not consume water during its operational phase, making this module not applicable.							
Reference service life	The 30 years' service life is derived from the life span of commercial buildings. After 30 years of electrical installation, there may be outdated infrastructure and advances in							

Scenarios and additional technical information								
Scenario	Parameter	Units	Results					
C1 - Deconstruction	In most cases, the cable trunking will remain in place until the demolition of the building, as it can be conveniently uninstalled when it reaches the end of its lifecycle. The demolition strategy for both the building and the cable trunking will vary significantly from one location to another, influenced by a variety of factors including the method of construction, the local geograph. Nonetheless, it is reasonable to infer that the energy required to dismantle the cable ladder, in comparison to the total energy expended on demolition, will be minimal. Consequently, no significant environmental impacts are assigned to module C1.							
C2 – End of Life transport	50km by road has been modell typical distance from the demol However, end-users of the EPI to calculate the impacts of a be for module C2 if required.	Litres per km	0.227					
	Distance: Deconstruction ur	km	50					
C3 – Waste Processing	The cable trunking produced by Philip Grahame is made entirely of 100% pre-galvanised steel. At the end of its life cycle, 95% of the steel will be recycled and 5% send to landfilling (BRE PCR EN 15804 + A2 Rev 3.1)Recycling processing has not been included in Module C3 because it is assumed to be very small and effectively negligible.Steel waste to recyclingkg0.95							
C4 - Disposal	5% of steel waste can't be recovered during recycling so they will be ended in landfilling.							
Module D	Steel waste to landfillkg0.05"Benefits and loads beyond the system boundary (Module D) accounts for the environmental benefits and loads resulting from the steel that is used as a raw material in steel making process via EAF or BOF and that is collected for recycling at end of life. These benefits and loads are calculated by excluding the pre-existing recycled steel that is used in the primary process.1 kg of product at the end of life, becomes 0.95 kg of scrap steel and as a small percentage will have lost due to wear, this 95% of the product will be recycled. In order to calculate the benefits of the product at Module D, the pre-existing recycled content will be excluded, and 							

### Interpretation

#### Individual product calculations

The LCA results listed in the table above are for Philip Grahame processing of 1 kg of Standard Cable Trunking with turnbuckle fasteners for the support and accommodation of cables. The end-user of this EPD can therefore use these results to calculate impact profile for each Philip Grahame's products listed in the tables below. The LCA results for each EN 15804 indicator will need to be multiplied by the weight of the respective product:

Product Code	Trunking Size (mm)	Body Thickness	Lid Thickness	Trunking Body Coil Width	Trunking Lid Coil Width	Combined body & lid coil width	Product weight (kg)	
TL3/22/G	50x50	0.8	0.8	170	73	243	4.5739	
TL3/32/G	75x50	0.9	0.9	195	98	293	6.2021	
TL3/33/G	75x75	0.9	0.9	245	98	343	7.2619	
TL3/42/G	100x42	0.9	0.9	220	123	343	7.2619	
TL3/43/G	100x75	0.9	0.9	270	123	393	8.3216	
TL3/44/G	100x100	0.9	0.9	320	123	443	9.3814	
TL3/62/G	150x50	0.9	1.15	270	173	N/A	10.3982	
TL3/63/G	150x75	0.9	1.15	320	173	N/A	11.4579	
TL3/64/G	150x100	0.9	1.15	370	173	N/A	12.5177	
TL3/66/G	150x150	1.15	1.15	470	173	643	17.4038	

#### **Example Calculation:**

If the customer wants to use the TL3/22/G product, by multiplying the weight 4.5739kg, by the impacts e.g. GWP Total =  $3.10e+0 \times 4.5739= 14.2 \text{ kg CO2}$  equivalent for TL3/22/G product. Please see the table below for the results of the TL3/22/G product.

Parameters describing environmental impacts									
			GWP-total	GWP- fossil	GWP- biogenic	GWP- luluc	ODP	AP	EP- freshwate r
		kg CO <sub>2</sub> eq	kg CO₂ eq	kg CO <sub>2</sub> eq	kg CO <sub>2</sub> eq	kg CFC11 eq	mol H⁺ eq	kg (PO <sub>4</sub> ) <sup>3-</sup> eq	
	Raw material supply	A1	1.37E+01	1.37E+01	5.44E-02	1.30E-02	7.78E-07	1.80E-01	6.63E-03
	Transport	A2	1.10E-01	1.10E-01	1.02E-04	4.49E-05	2.59E-08	6.27E-04	7.46E-06
Product stage	Manufacturing	A3	3.44E-01	3.36E-01	7.64E-03	2.45E-04	4.76E-08	2.28E-03	3.26E-05
	Total (of product stage)	A1-3	1.42E+01	1.41E+01	6.17E-02	1.33E-02	8.51E-07	1.82E-01	6.68E-03

### References

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A2:2019. London, BSI, 2019.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (exactly identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.

BSI. Cable trunking systems and cable ducting systems for electrical installations - Part 1: General requirements. BS EN 50085-1. London, BSI, 2013.

BSI. Continuously hot-dip coated steel flat products for cold forming - Technical delivery conditions. BS EN 10346. London, BSI, 2015.

BRE Global. BRE Global Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012 + A2:2019. PN514 Rev 3.1. Watford, BRE, 2023.